



## STRUTTED INTERIOR/EXTERIOR HIGH SPEED FABRIC DOOR



**PERFECT FOR MANUFACTURING, FOOD AND BEVERAGE, COLD STORAGE, WAREHOUSE AND DISTRIBUTION FACILITIES**

- **Engineered for high cycles**
  - Springless design requires minimal interruption for maintenance
  - Direct-mounted gear drive minimizes wear and tear
  - Variable frequency drive eliminates sudden jolts from door start/stop
  - Patented breakaway system design with impact detection and push button self-repair
- **Strut design**
  - Allows for quick section replacement
  - Reducing curtain deflection under pressure
- **Designed for use in both interior and exterior applications**
  - Choose from standard interior or optional exterior curtain material
- **Low maintenance**
  - Breakaway design with impact detection
  - Push button self-repair; plug and play wiring
- **Standard hood** blocks debris and moisture from impeding door operation
- **Optional programmable LED lighting system**



INDUSTRY LEADING  
COMMERCIAL & INDUSTRIAL SOLUTIONS

# MODEL 992 STRUTTED INTERIOR/EXTERIOR HIGH SPEED FABRIC DOOR

## Standard Features at a Glance

Maximum Width	16'
Maximum Height	15'
Maximum Opening Speed	Up to 65"/sec
Maximum Closing Speed	Up to 40"/sec
Breakaway Self Reset	Yes
Wind Load*	Up to 4.0 psf
Wind Strut	Metal strut
Interior Application Curtain Material	2 layers of PVC-coated polyester with 1 layer of polyester weave
Operation	Direct drive motor and gearbox system with field changeable universal handing and door stop safety device
Hood	Protection from debris and moisture
Control Panel	Variable frequency drive NEMA 4X cULus listed; Onboard self diagnostic and service reminder; Built-in padlockable fused disconnect
Obstruction Safety Detection	Infrared sensors mounted in-plane to the door curtain at 18" and 50" - 54" from floor
Reversing Safety Edge	Wireless reversing edge
Available Supply Voltages**	120V AC 1PH, 208V AC 1PH†, 220V AC 1PH, 208V AC 3PH†, 230V AC 3PH, 460V AC 3PH, 575V AC 3PH† (†requires stand-alone mounted transformer)
Hinged Guides	Provide easy access for maintenance
Warranty	5-Year Limited

## Options

- **Actuation options** – Push button, key switch, pull switch, loop detector, motion detector, treadle switch, radio control. Wireless options available
- **Signaling device options** – Red/green LED warning light, horn/strobe combination, rotating warning light
- **Programmable LED lighting system** – 3' tall light bar with red, yellow, green lighting
- **Exterior/Interior application curtain material upgrade** – 3 layers of PVC-coated polyester with 2 layers of polyester weave
- **Food and beverage applications** – an FDA-compliant fabric is available
- **Sloped hood and non-drive end cover** – protection from debris and moisture
- **20" high vision panels** – spaced evenly across width of door
- **Light Curtain** – Front or rear mounted; available in 3' or 6' models

## Curtain Color Options

### Interior Applications



White

Gray

Red



Blue

Black

Orange



Yellow


### FDA-Compliant Applications (optional)



FDA Royal Blue

FDA White

### Exterior Applications

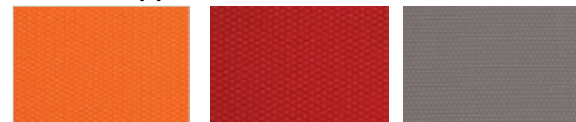

Orange

Red

Gray



Blue

Standard color for guides and bottom bar is yellow. Approximately 200 optional RAL powder coat colors are also available.



Actual colors may vary from brochure due to fluctuation in the printing process. **Always request a color sample from your Overhead Door™ Distributor for accurate color matching.**

\* Wind load is the ultimate pressure tested at door width of 16'.

\*\* Single phase available up to 10' doors.



INDUSTRY LEADING  
COMMERCIAL & INDUSTRIAL SOLUTIONS



2501 S. State Hwy. 121 Bus., Suite 200, Lewisville, TX 75067

1-800-929-DOOR • sales@overheaddoor.com

overheaddoor.com