



MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
470	20'	14' 1"


NOTE: 5 SECTION, 3 PANEL DOOR SHOWN
SECTION AND PANEL QTY WILL VARY

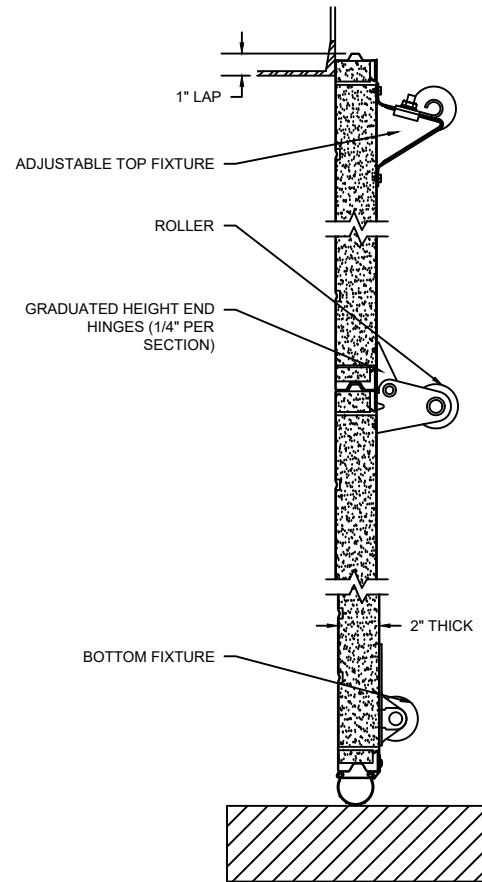

SECTION B-B

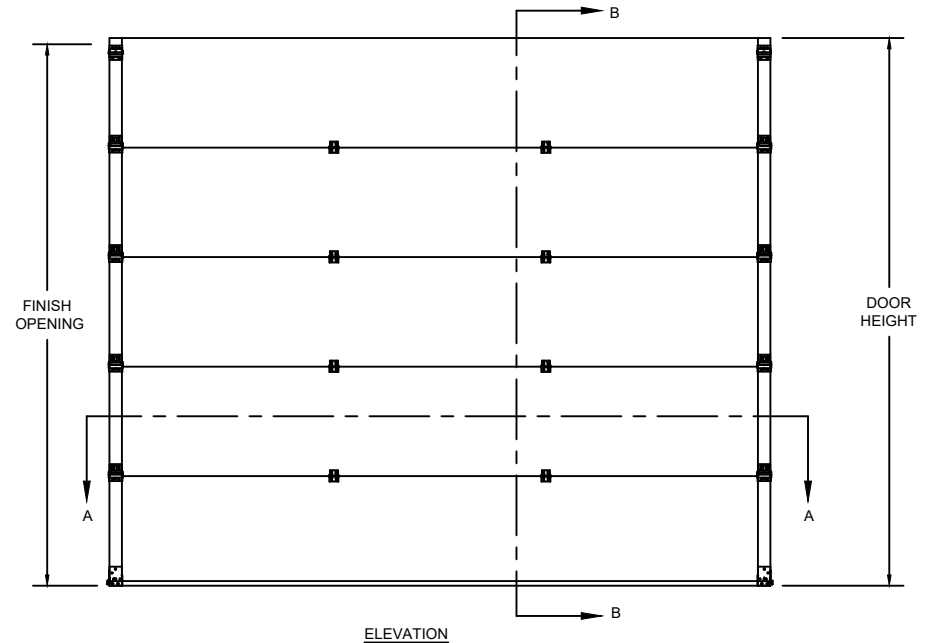

ELEVATION

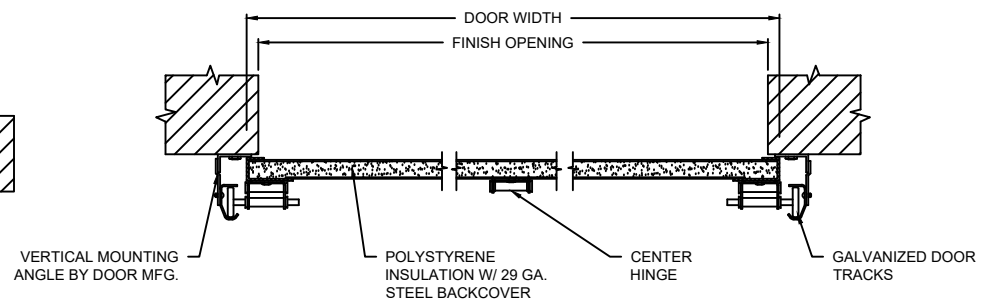

SECTION A-A

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
DOOR TRACK SIZE	<input type="checkbox"/> 2" <input type="checkbox"/> 3"
WINDOW OPTIONS	<input type="checkbox"/> NO WINDOW <input type="checkbox"/> ONE - 24" X 7" <input type="checkbox"/> TWO - 24" X 7" <input type="checkbox"/> THREE - 24" X 7" <input type="checkbox"/> ONE - 25" X 12" <input type="checkbox"/> TWO - 25" X 12" <input type="checkbox"/> THREE - 25" X 12" <input type="checkbox"/> CLEAR LONG <input type="checkbox"/> CLEAR SHORT
SEAL OPTIONS	<input type="checkbox"/> JAMB SEAL <input type="checkbox"/> STANDARD BOTTOM SEAL <input type="checkbox"/> TOP SEAL <input type="checkbox"/> ELECTRIC SAFETY EDGE <input type="checkbox"/> PNEUMATIC SAFETY EDGE
LOCK OPTIONS	<input type="checkbox"/> SLIDE LOCK (LEFT) <input type="checkbox"/> SLIDE LOCK (RIGHT)

SECTIONAL STEEL

470 SECTIONAL STEEL-BACK DOOR (INSULATED)

COMPONENT	MATERIAL	OPERATION	NOTES:
SECTIONS	26 GA. HOT-DIPPED GALVANIZED	MANUAL PUSH UP	- INSULATION WILL BE COMPOSED OF POLYSTYRENE. THE INSULATION WILL HAVE A U-FACTOR OF 0.23 (R-VALUE OF 9.83). U-FACTOR VALUES ARE INDEPENDENTLY TESTED AND VERIFIED PER ANSI/DASMA 105. OVERHEAD DOOR™ BRAND USES A CALCULATED DOOR SECTION R-VALUE FOR OUR INSULATED DOORS.
END STILES	.032" STEEL		
HARDWARE	GALVANIZED STEEL		
WEATHERSTRIP	FLEXIBLE PVC		

DWG. NO.	DATE:	
SHEET	BY:	