



C-187 SLAT DETAIL



C-275 SLAT DETAIL




F-265 SLAT DETAIL


OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ C-187 ☐ C-275 ☐ F-265
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTOGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610S	30'	20'

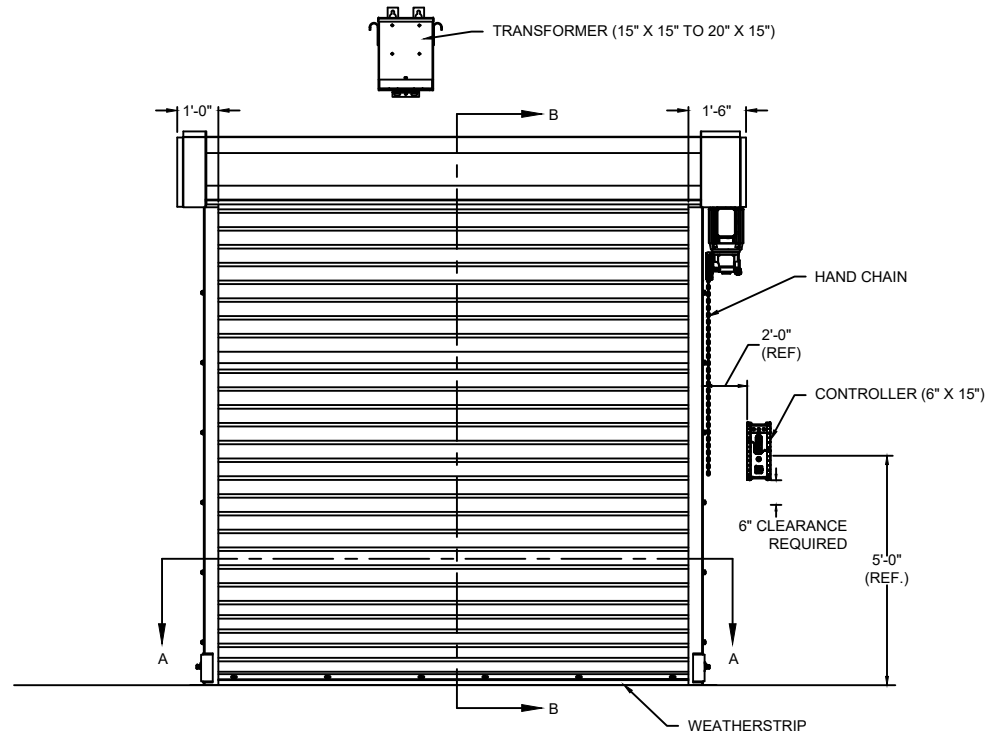

ELEVATION

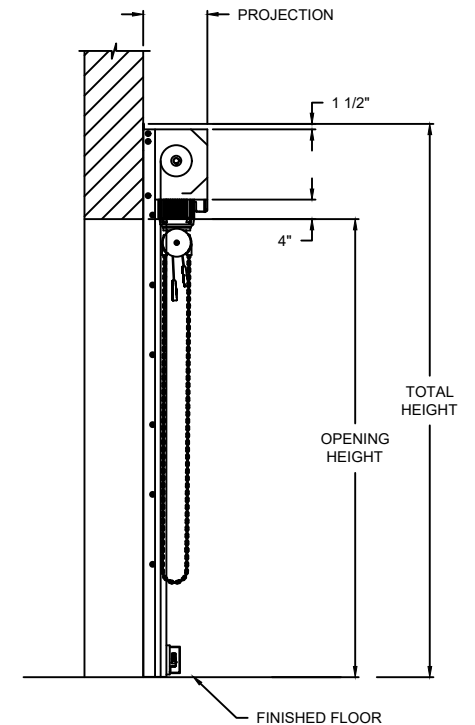

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"




SECTION A-A

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR RH 208V 1-PHASE 60HZ VIA TRANSFORMER (190-207 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERSERVE®

610S HEAVY DUTY SPRINGLESS SERVICE DOOR


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR!
SHEET	BY:	



C-187 SLAT DETAIL




C-275 SLAT DETAIL



F-265 SLAT DETAIL

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ C-187 ☐ C-275 ☐ F-265
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

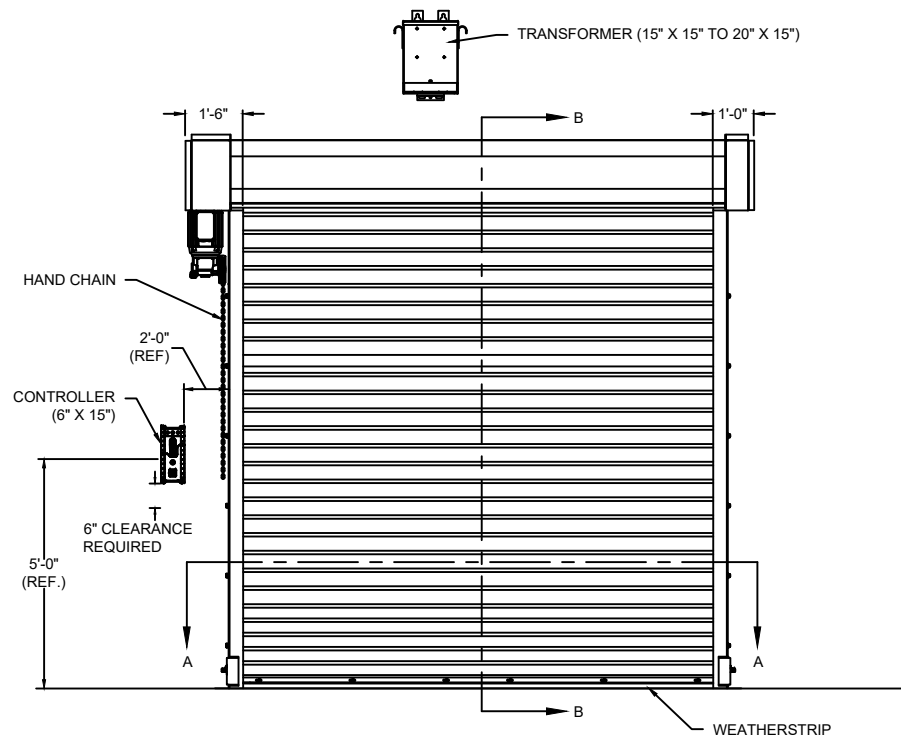


ELEVATION



SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610S	30'	20'

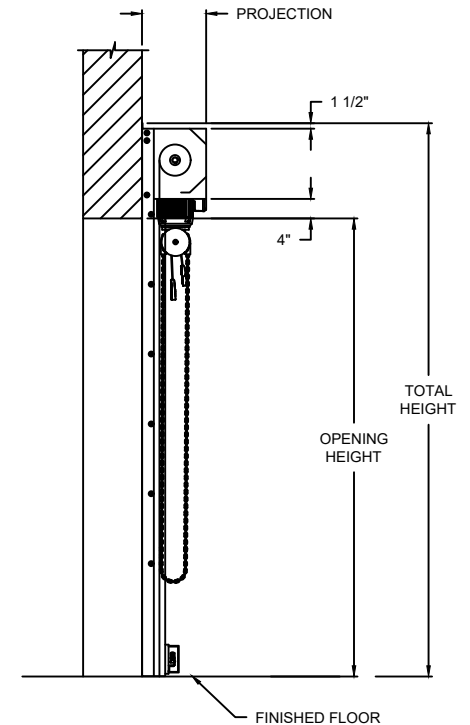

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR LH 208V 1-PHASE 60HZ VIA TRANSFORMER (190-207 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERSERVE®

610S HEAVY DUTY SPRINGLESS SERVICE DOOR


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



C-187 SLAT DETAIL



C-275 SLAT DETAIL




F-265 SLAT DETAIL


OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ C-187 ☐ C-275 ☐ F-265
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610S	30'	20'

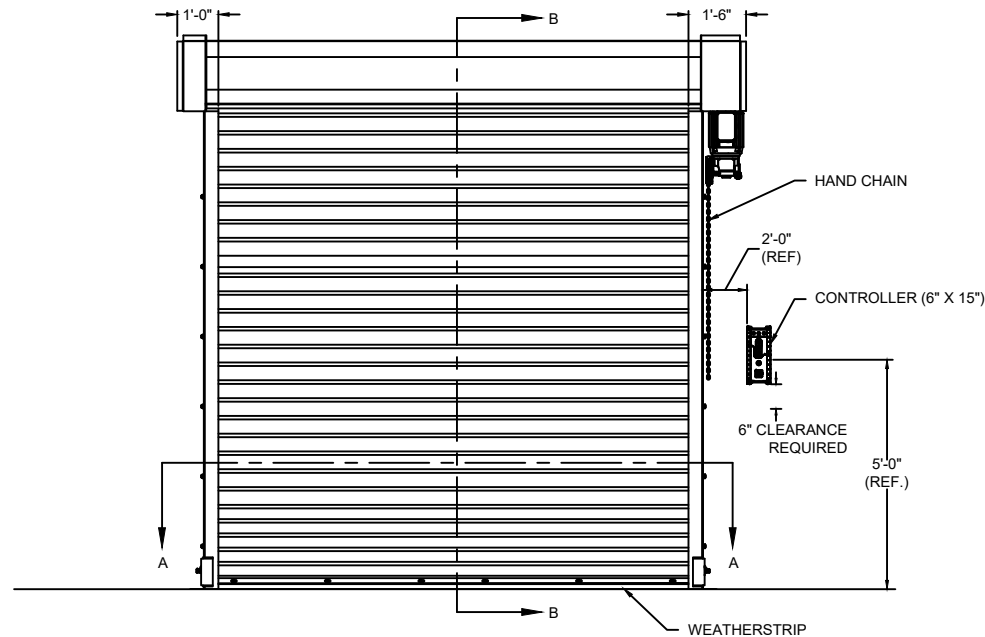

ELEVATION

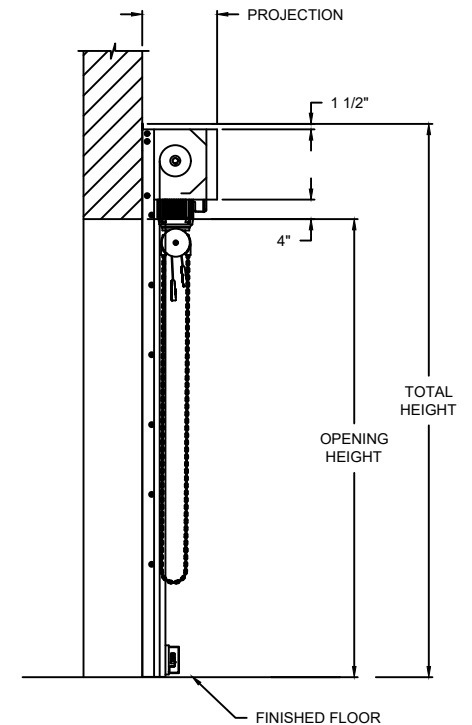

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"




SECTION A-A

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR RH 230V 1-PHASE 60HZ VIA (208-245 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERSERVE®

610S HEAVY DUTY SPRINGLESS SERVICE DOOR


DWG. NO.	DATE:	The Genuine. The Original. EVERSERVE® OVERHEAD DOOR
SHEET	BY:	



C-187 SLAT DETAIL




C-275 SLAT DETAIL



F-265 SLAT DETAIL

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ C-187 ☐ C-275 ☐ F-265
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

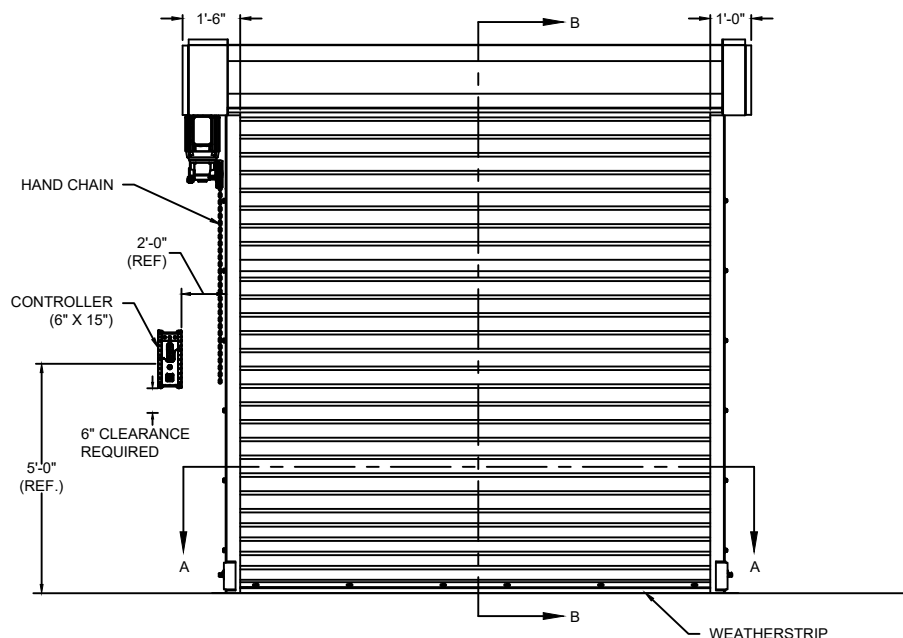


ELEVATION



SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610S	30'	20'

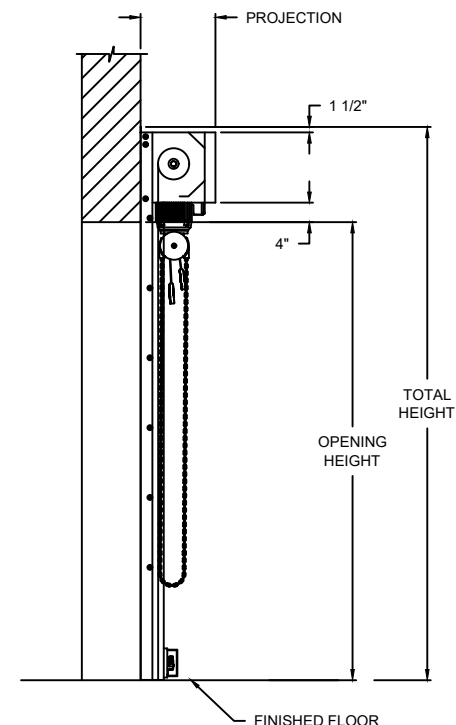

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR LH 230V 1-PHASE 60HZ VIA (208-245 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERSERVE®

610S HEAVY DUTY SPRINGLESS SERVICE DOOR


DWG. NO.	DATE:	The Genuine. The Original.
SHEET	BY:	



C-187 SLAT DETAIL



C-275 SLAT DETAIL




F-265 SLAT DETAIL


OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ C-187 ☐ C-275 ☐ F-265
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610S	30'	20'

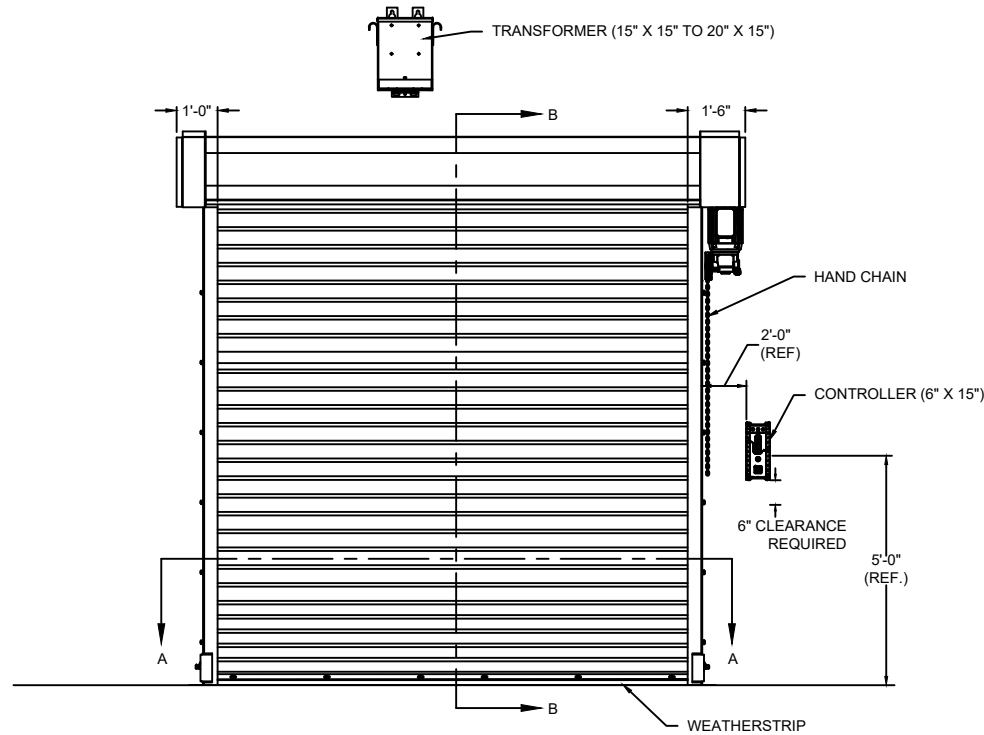

ELEVATION

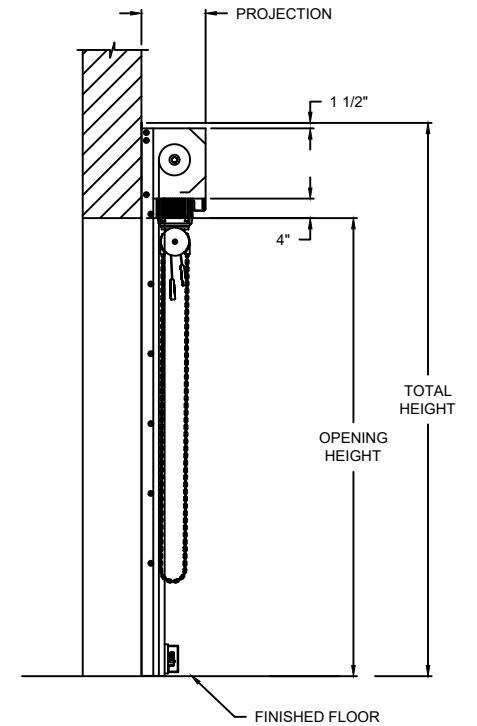

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"




SECTION A-A

EVERSERVE®


610S HEAVY DUTY SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. EVERSERVE OVERHEAD DOOR
SHEET	BY:	


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR RH 208V 3-PHASE 60HZ VIA TRANSFORMER (190-207 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		



C-187 SLAT DETAIL



C-275 SLAT DETAIL




F-265 SLAT DETAIL

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ C-187 ☐ C-275 ☐ F-265
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610S	30'	20'

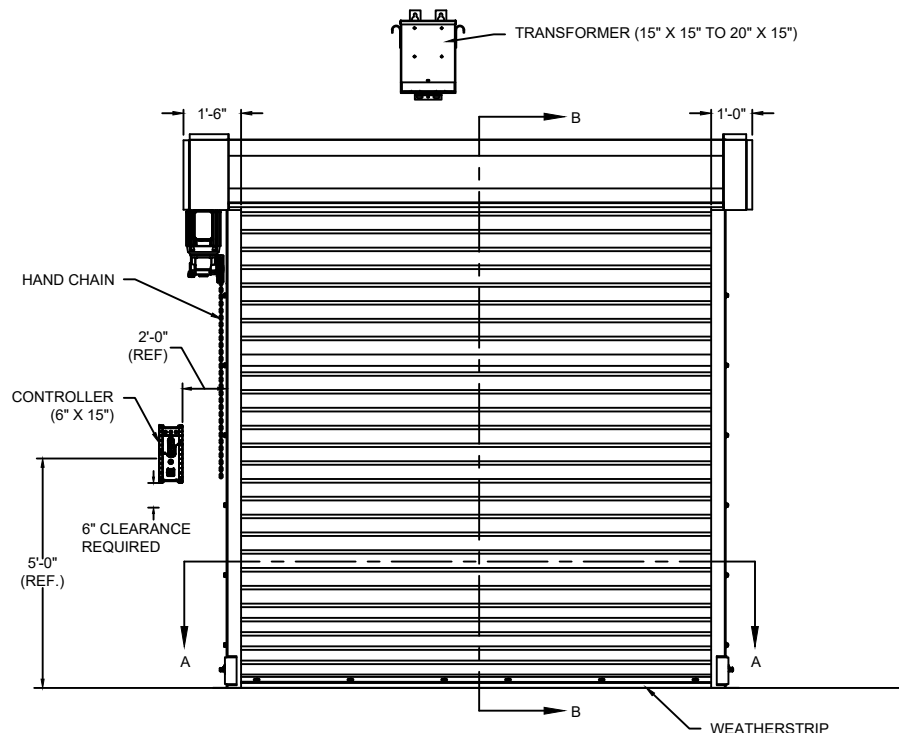

ELEVATION



SECTION A-A

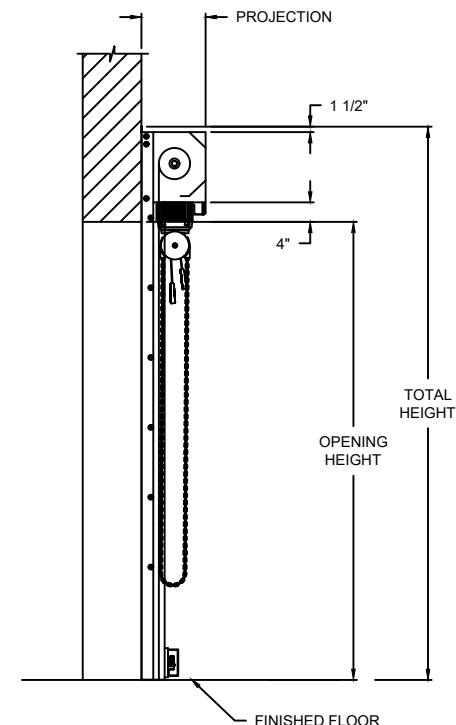

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR LH 208V 3-PHASE 60HZ VIA TRANSFORMER (190-207 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERSERVE®

610S HEAVY DUTY SPRINGLESS SERVICE DOOR


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



C-187 SLAT DETAIL



C-275 SLAT DETAIL




F-265 SLAT DETAIL


OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ C-187 ☐ C-275 ☐ F-265
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610S	30'	20'

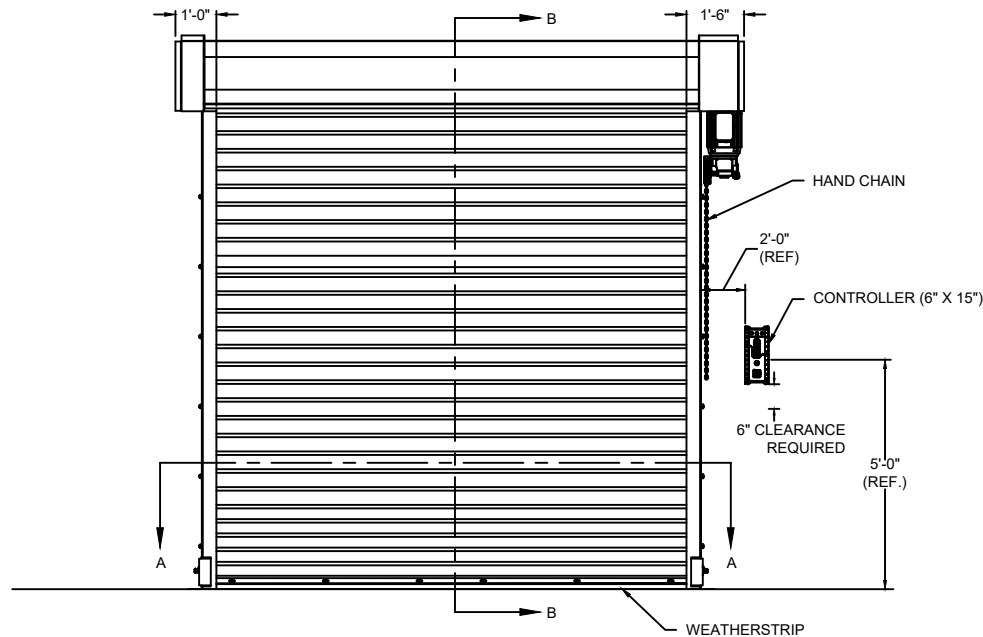

ELEVATION

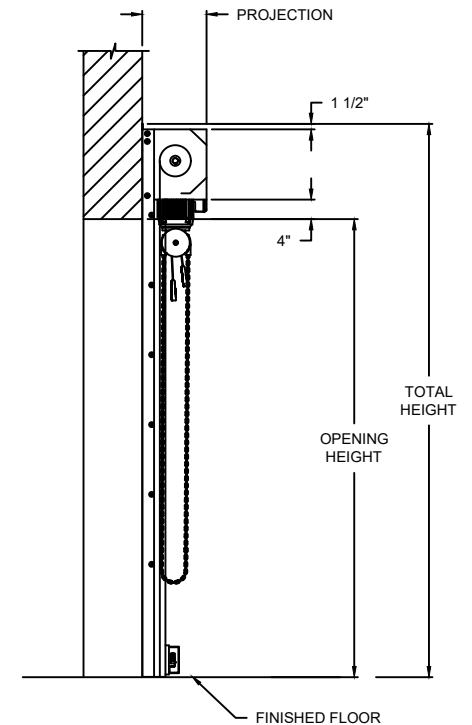

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"




SECTION A-A

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR RH 230V 3-PHASE 60HZ VIA TRANSFORMER (208-245 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERSERVE®

610S HEAVY DUTY SPRINGLESS SERVICE DOOR


DWG. NO.	DATE:	The Genuine. The Original. EVERSERVE OVERHEAD DOOR
SHEET	BY:	



C-187 SLAT DETAIL




C-275 SLAT DETAIL



F-265 SLAT DETAIL

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ C-187 ☐ C-275 ☐ F-265
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

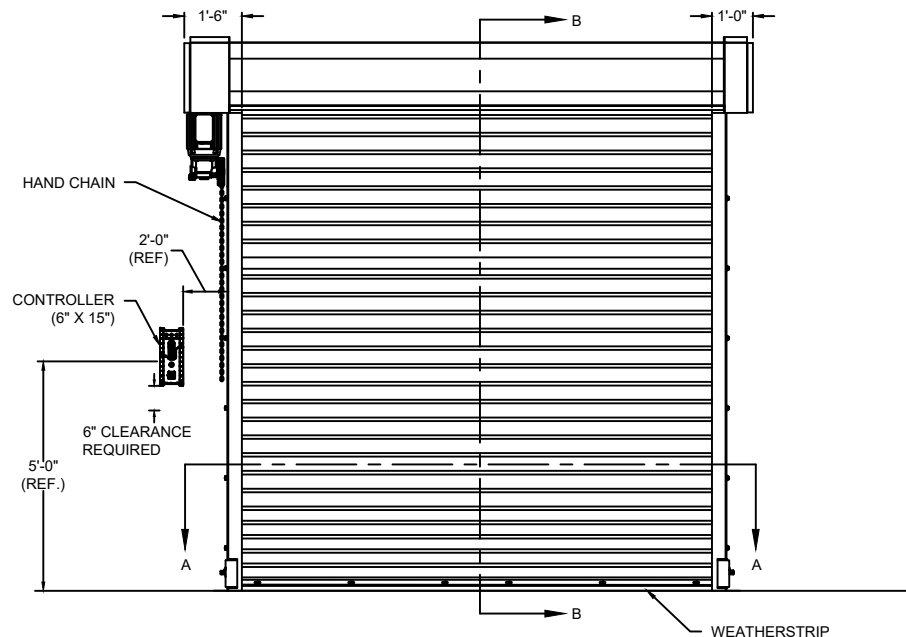


ELEVATION



SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610S	30'	20'

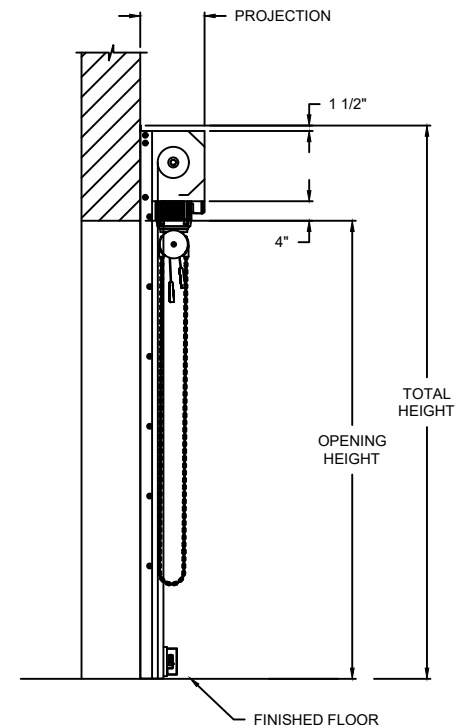

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT MATERIAL OPERATION NOTES:

HOOD	24 GA. GALVANIZED STEEL	MOTOR LH 230V 3-PHASE 60HZ VIA TRANSFORMER (208-245 V RANGE)
CURTAIN	GALVANIZED STEEL	
GUIDES	STEEL ANGLES	
BOTTOM BAR	STEEL ANGLES	


1. WINDLOAD 20 P.S.F

EVERSERVE®


610S HEAVY DUTY SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR!
SHEET	BY:	


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610S	30'	20'



C-187 SLAT DETAIL




C-275 SLAT DETAIL




F-265 SLAT DETAIL

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ C-187 ☐ C-275 ☐ F-265
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

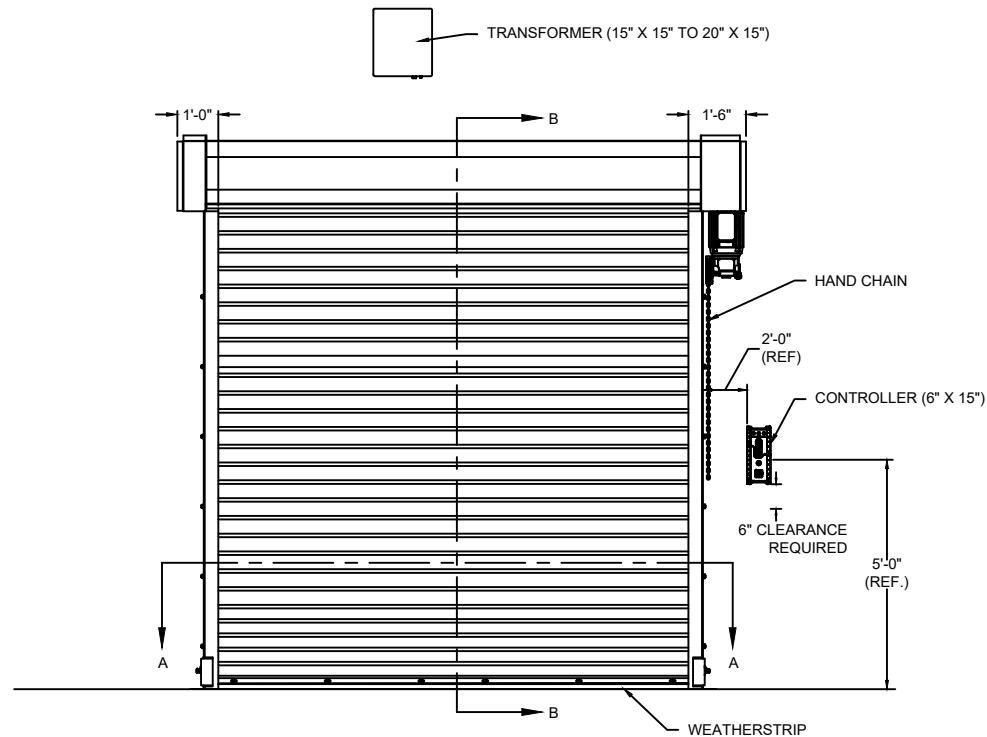

ELEVATION

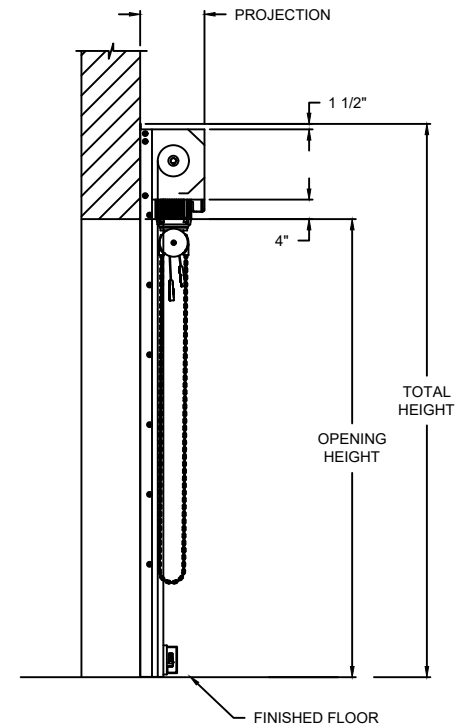

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"



SECTION A-A


EVERSERVE®

610S HEAVY DUTY SPRINGLESS SERVICE DOOR


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR RH 460V 3-PHASE 60HZ VIA TRANSFORMER (456-495V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610S	30'	20'



C-187 SLAT DETAIL




C-275 SLAT DETAIL



F-265 SLAT DETAIL

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ C-187 ☐ C-275 ☐ F-265
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

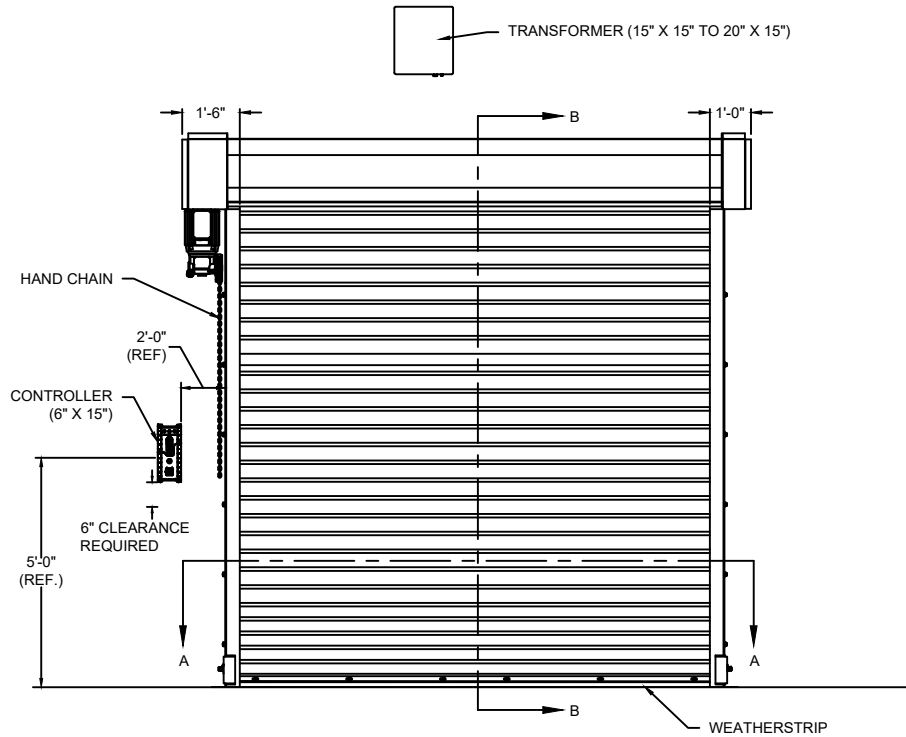

ELEVATION



SECTION A-A

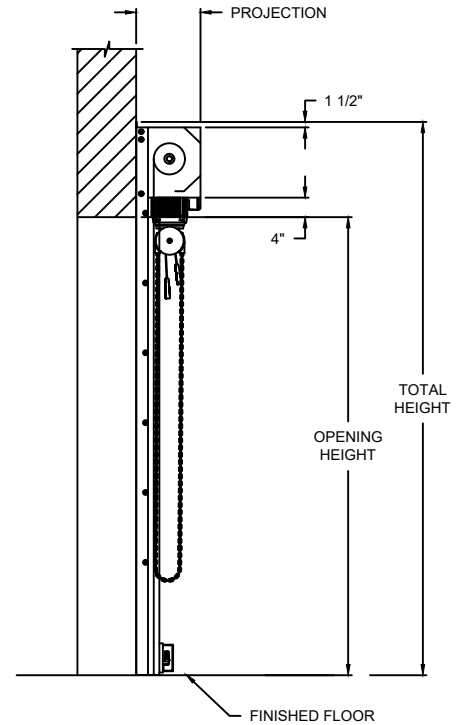

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"


EVERSERVE®

610S HEAVY DUTY SPRINGLESS SERVICE DOOR


DWG. NO.	DATE:	The Genuine. The Original.
SHEET	BY:	

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR LH 460V 3-PHASE 60HZ VIA TRANSFORMER (456-495V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610S	30'	20'



C-187 SLAT DETAIL




C-275 SLAT DETAIL



F-265 SLAT DETAIL

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ C-187 ☐ C-275 ☐ F-265
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

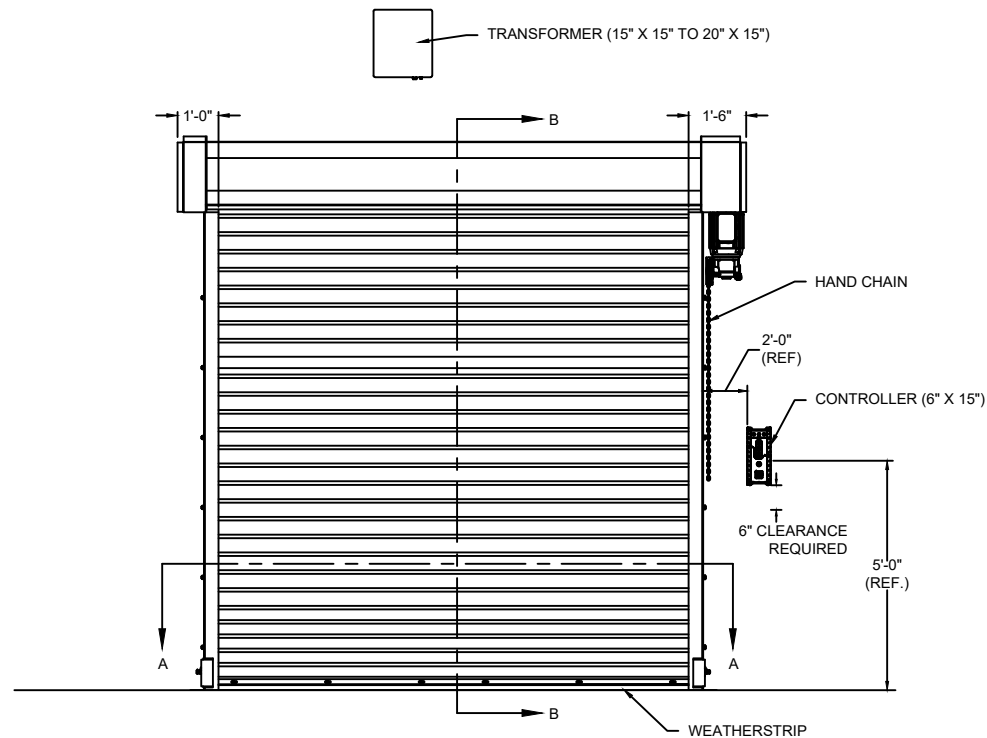

ELEVATION



SECTION A-A

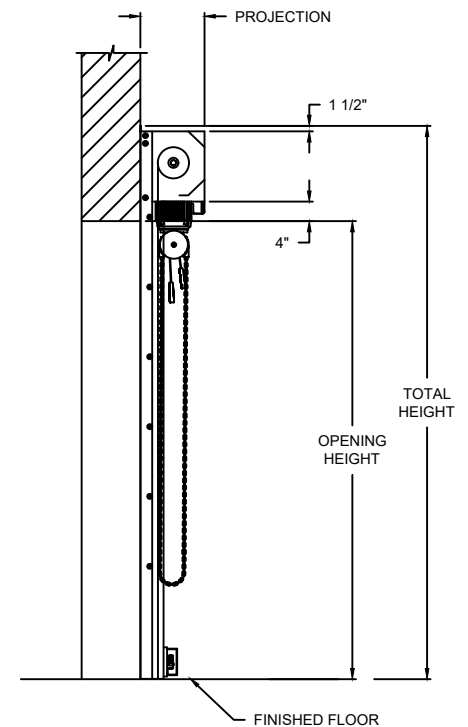

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR RH 575 V 3-PHASE 60HZ	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERSERVE®


610S HEAVY DUTY SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610S	30'	20'



C-187 SLAT DETAIL




C-275 SLAT DETAIL



F-265 SLAT DETAIL

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ C-187 ☐ C-275 ☐ F-265
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

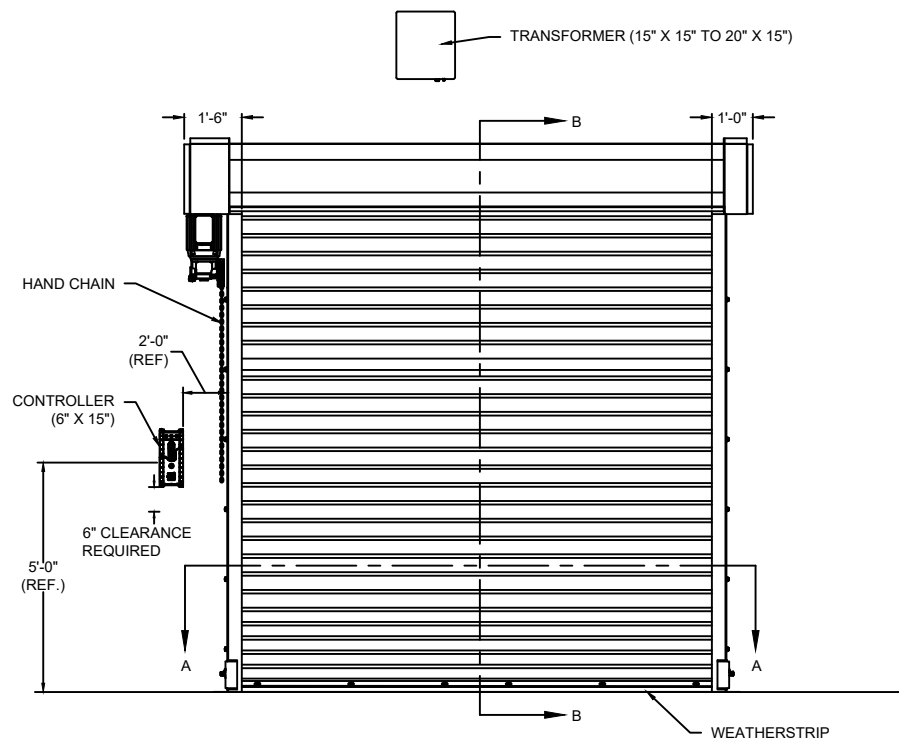

ELEVATION



SECTION A-A

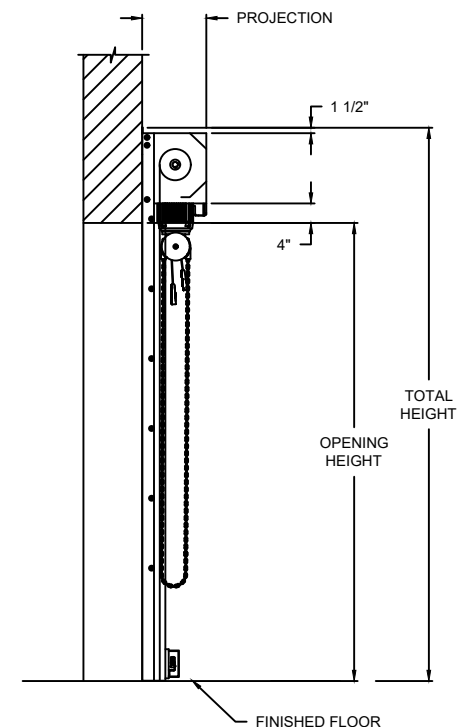

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR LH 575 V 3-PHASE 60HZ	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERSERVE®

610S HEAVY DUTY SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	