


F-265 SLAT DETAIL

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620S	30'	20'

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTOGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

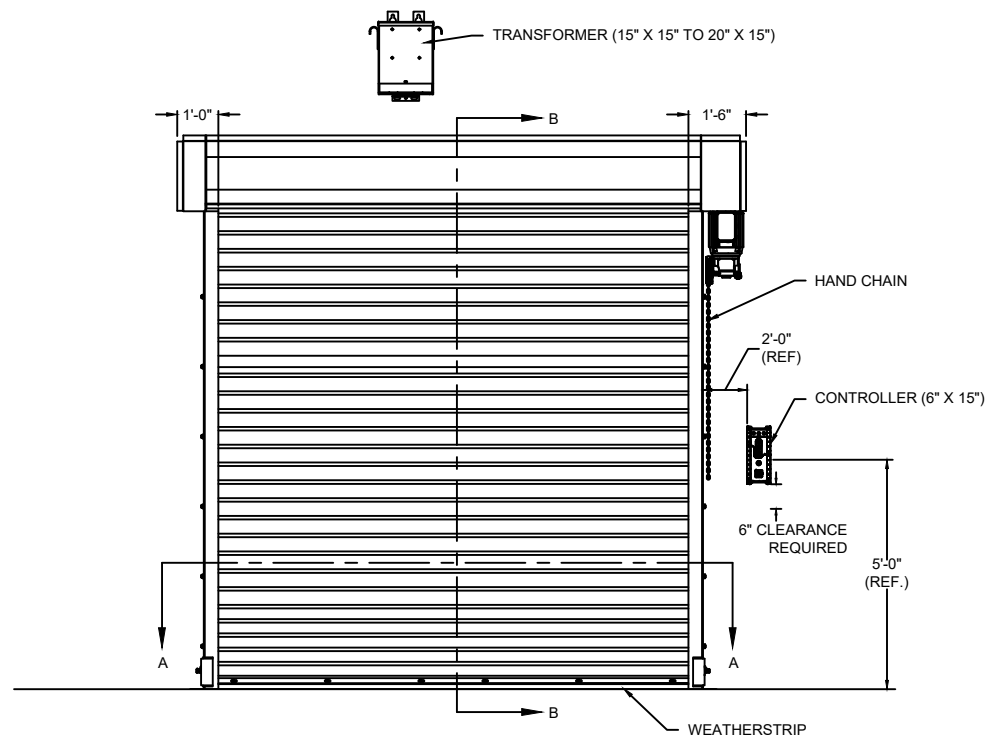

ELEVATION



SECTION A-A

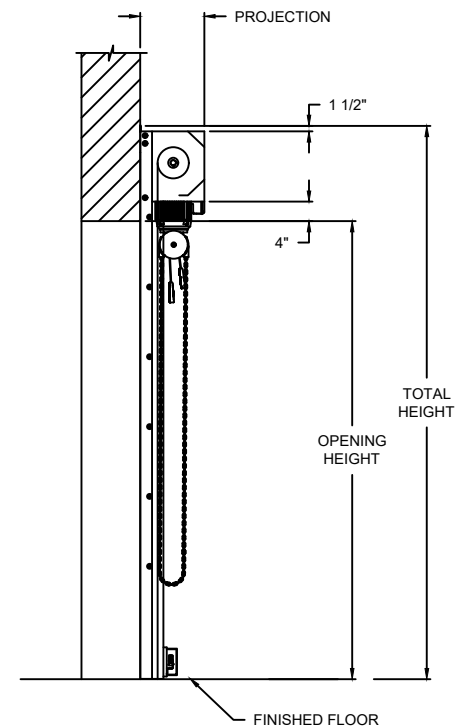

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR RH 208V 1-PHASE 60HZ VIA TRANSFORMER (190-207 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERSERVE®

620S HEAVY DUTY STORMTITE™ SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. EVERSERVE®
SHEET	BY:	




F-265 SLAT DETAIL

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620S	30'	20'

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

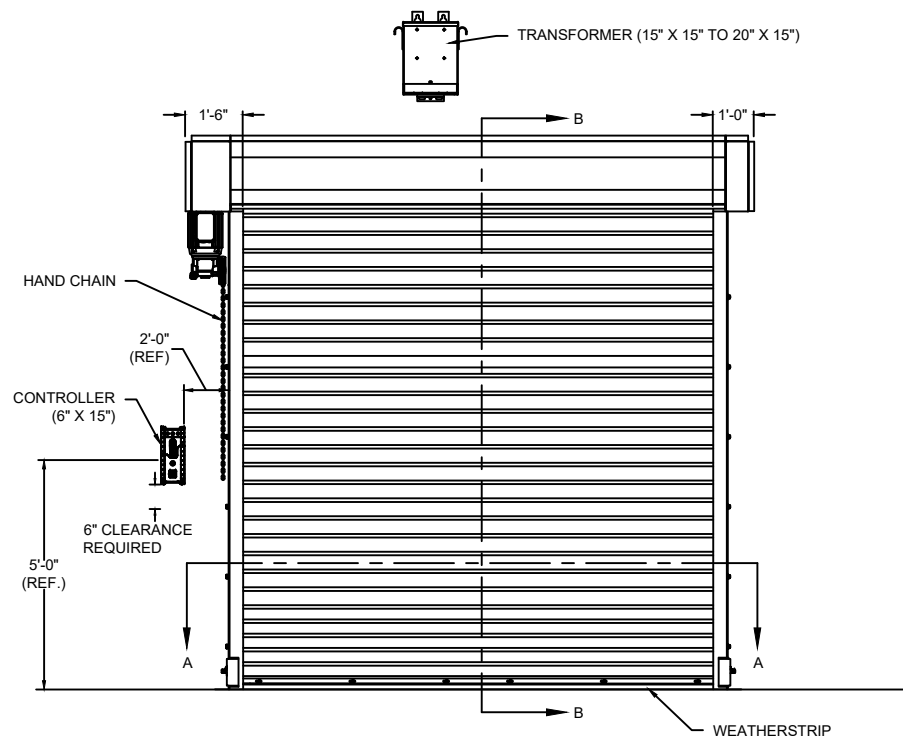

ELEVATION



SECTION A-A

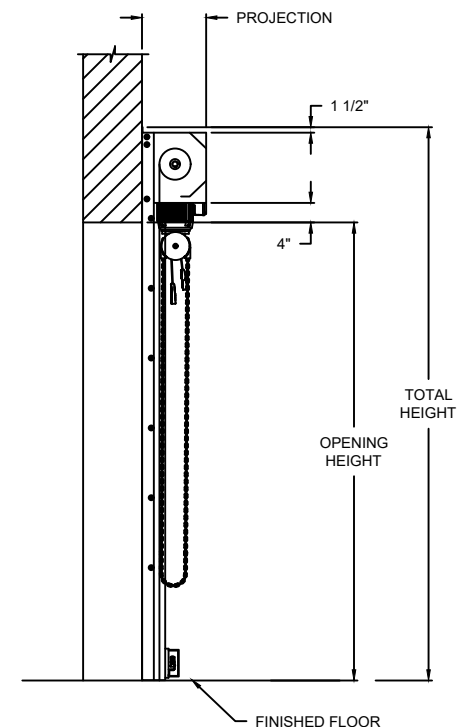

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT	MATERIAL	OPERATION	NOTES:
-----------	----------	-----------	--------

HOOD	24 GA. GALVANIZED STEEL	MOTOR LH 208V 1-PHASE 60HZ VIA TRANSFORMER (190-207 V RANGE)	1. WINDLOAD 20 P.S.F
------	-------------------------	---	----------------------

CURTAIN	GALVANIZED STEEL
---------	------------------


GUIDES	STEEL ANGLES
--------	--------------

BOTTOM BAR	STEEL ANGLES
------------	--------------

EVERSERVE®

620S HEAVY DUTY STORMTITE™ SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. EVERSERVE OVERHEAD DOOR
SHEET	BY:	




F-265 SLAT DETAIL


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620S	30'	20'

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTOGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

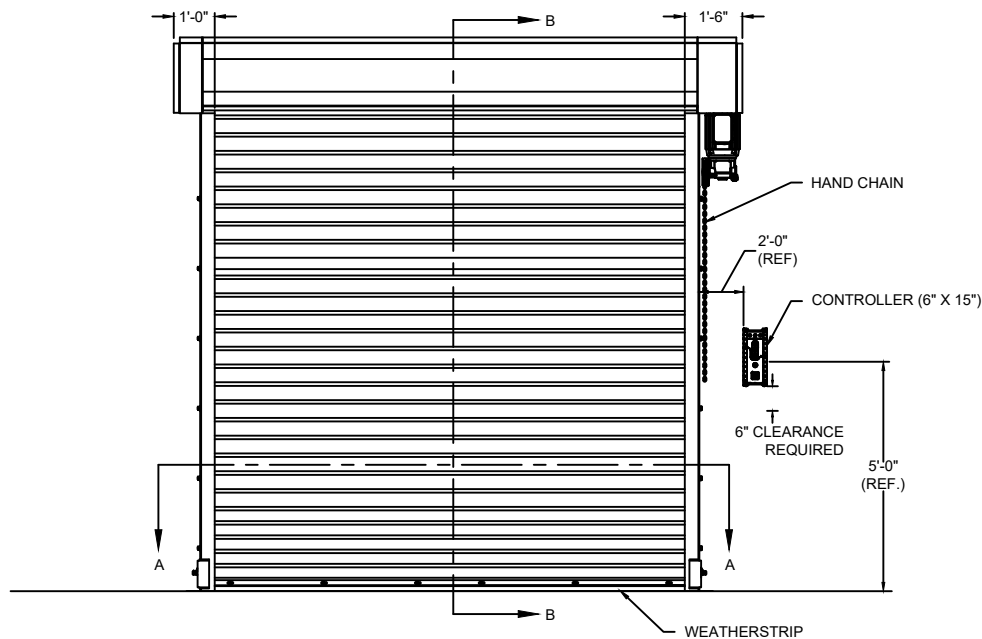

ELEVATION

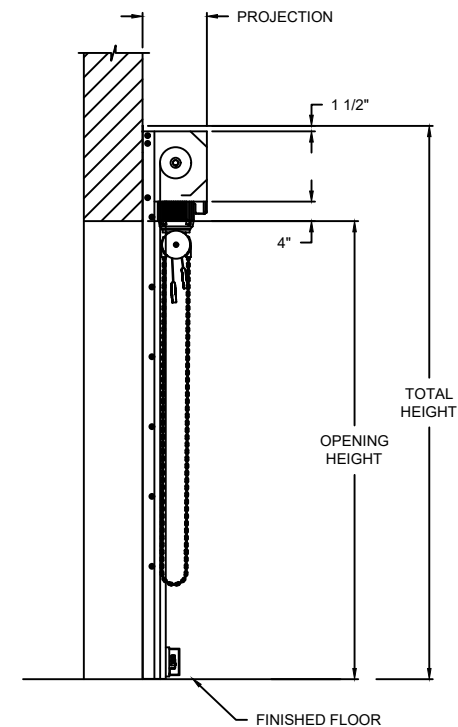

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"




SECTION A-A

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR RH 230V 1-PHASE 60HZ VIA (208-245 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERSERVE®

620S HEAVY DUTY STORMTITE™ SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	




F-265 SLAT DETAIL

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620S	30'	20'

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

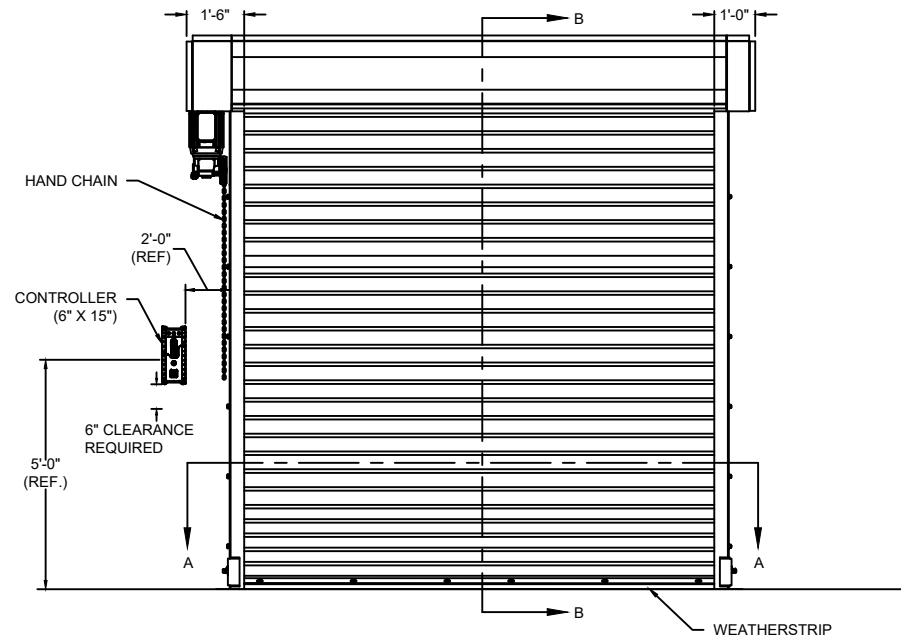

ELEVATION



SECTION A-A

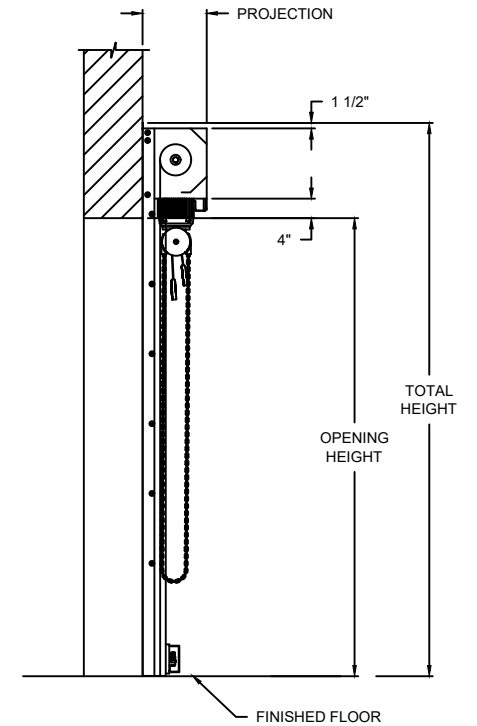

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR LH 230V 1-PHASE 60HZ VIA (208-245 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERSERVE®

620S HEAVY DUTY STORMTITE™ SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. EVERSERVE®
SHEET	BY:	




F-265 SLAT DETAIL


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620S	30'	20'

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

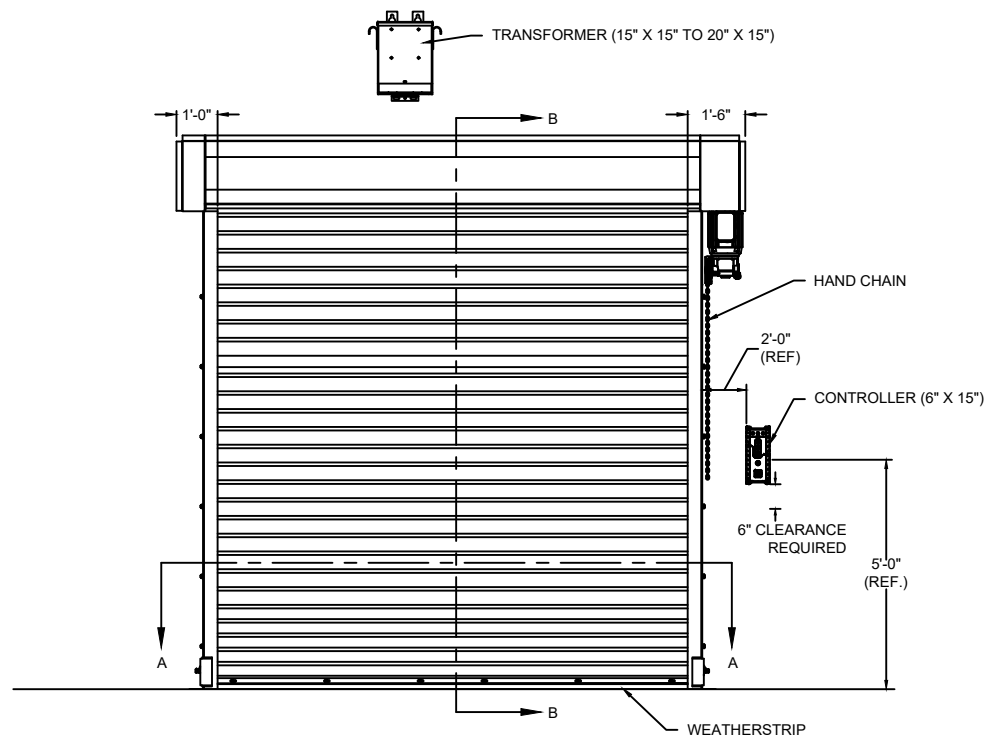

ELEVATION

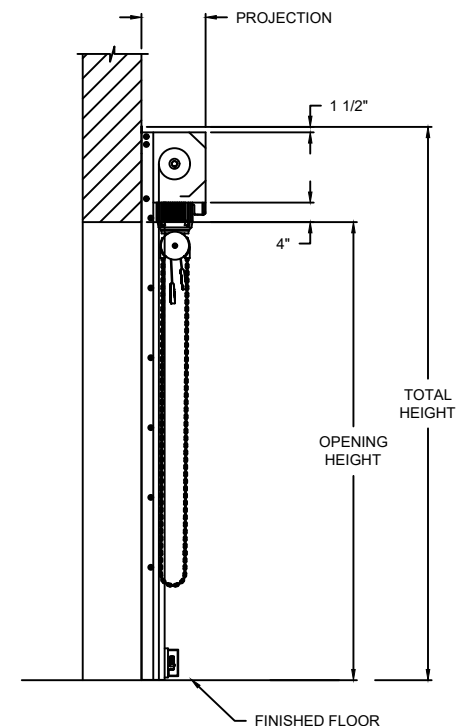

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"




SECTION A-A

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR RH 208V 3-PHASE 60HZ VIA TRANSFORMER (190-207 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERSERVE®

620S HEAVY DUTY STORMTITE™ SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	




F-265 SLAT DETAIL

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620S	30'	20'

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTOGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

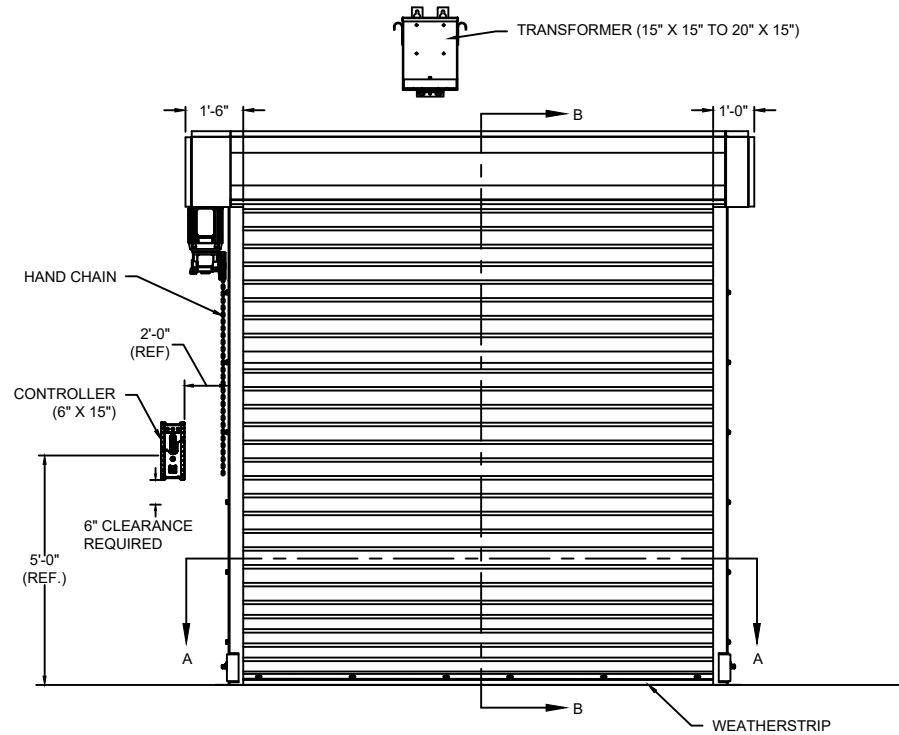

ELEVATION



SECTION A-A

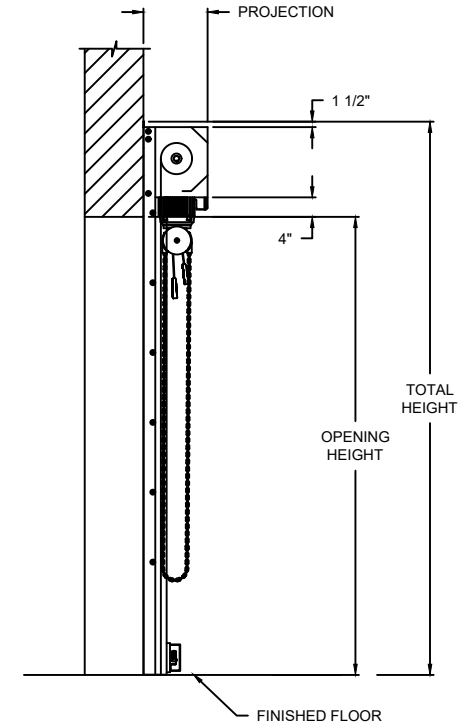

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR LH 208V 3-PHASE 60HZ VIA TRANSFORMER (190-207 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERSERVE®

620S HEAVY DUTY STORMTITE™ SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. EVERSERVE® OVERHEAD DOOR
SHEET	BY:	




F-265 SLAT DETAIL


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620S	30'	20'

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

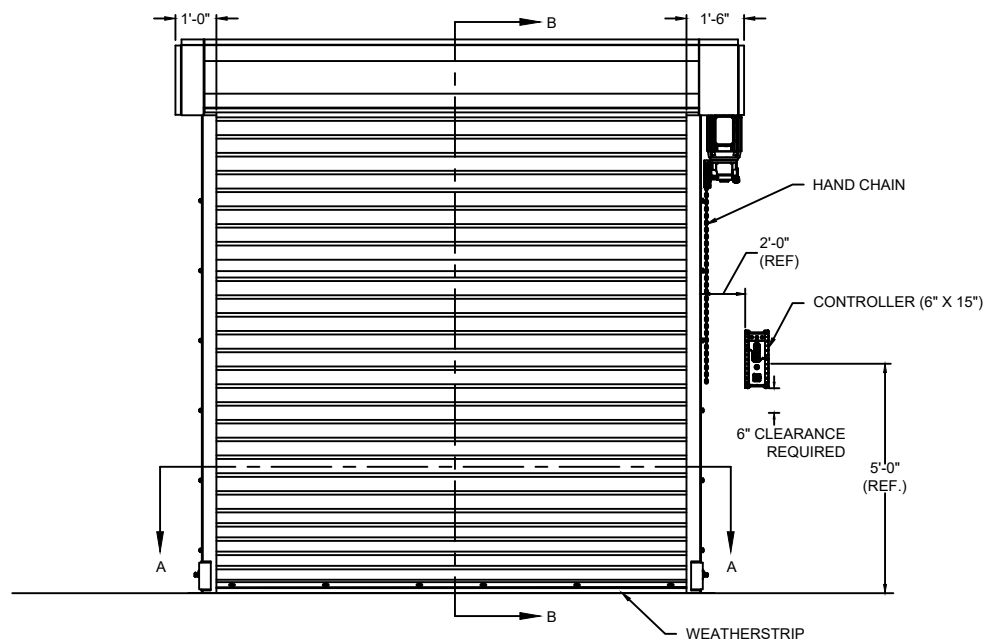

ELEVATION

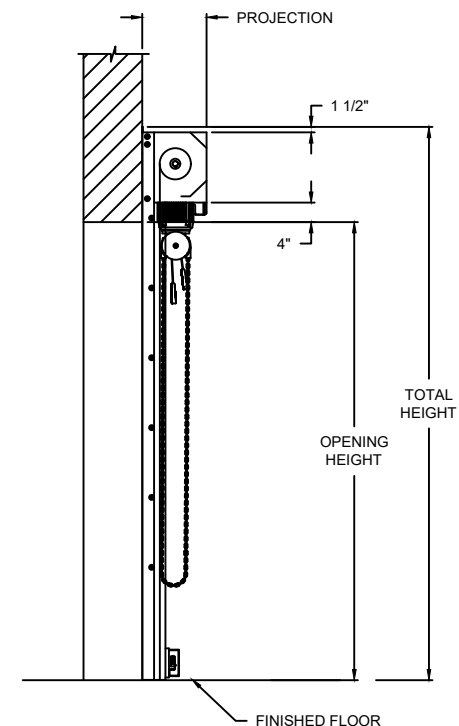

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"




SECTION A-A

EVERSERVE®

620S HEAVY DUTY STORMTITE™ SPRINGLESS SERVICE DOOR

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR RH 230V 3-PHASE 60HZ VIA TRANSFORMER (208-245 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	




F-265 SLAT DETAIL

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620S	30'	20'

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

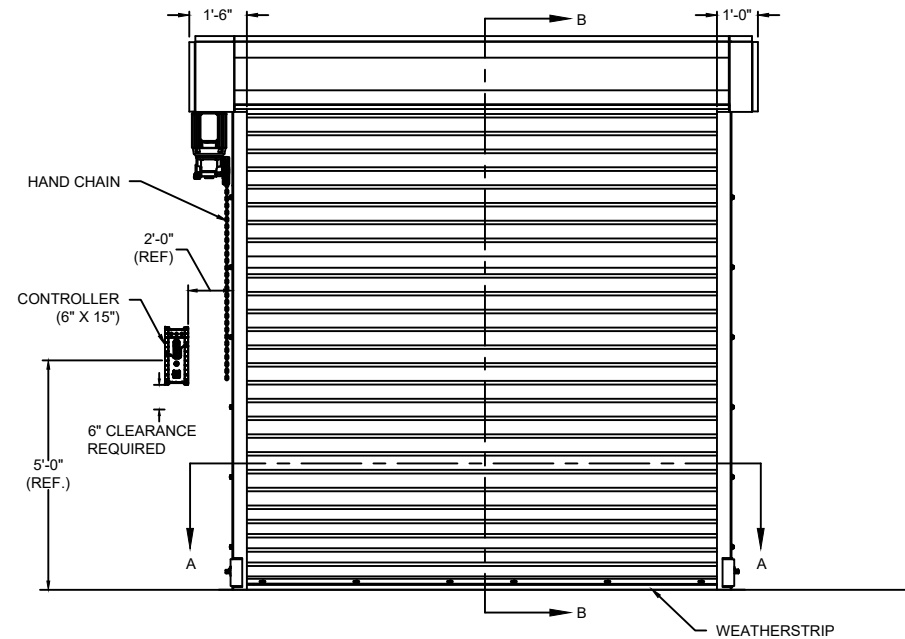

ELEVATION



SECTION A-A

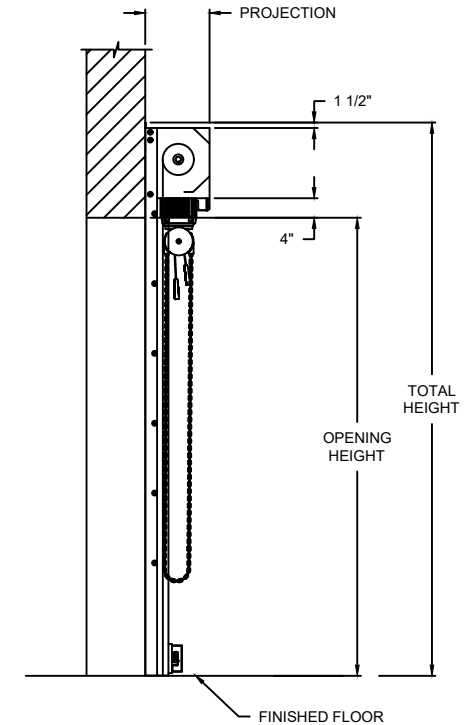

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR LH 230V 3-PHASE 60HZ VIA TRANSFORMER (208-245 V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERSERVE®

620S HEAVY DUTY STORMTITE™ SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. EVERSERVE® OVERHEAD DOOR
SHEET	BY:	




F-265 SLAT DETAIL


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620S	30'	20'

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTOGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

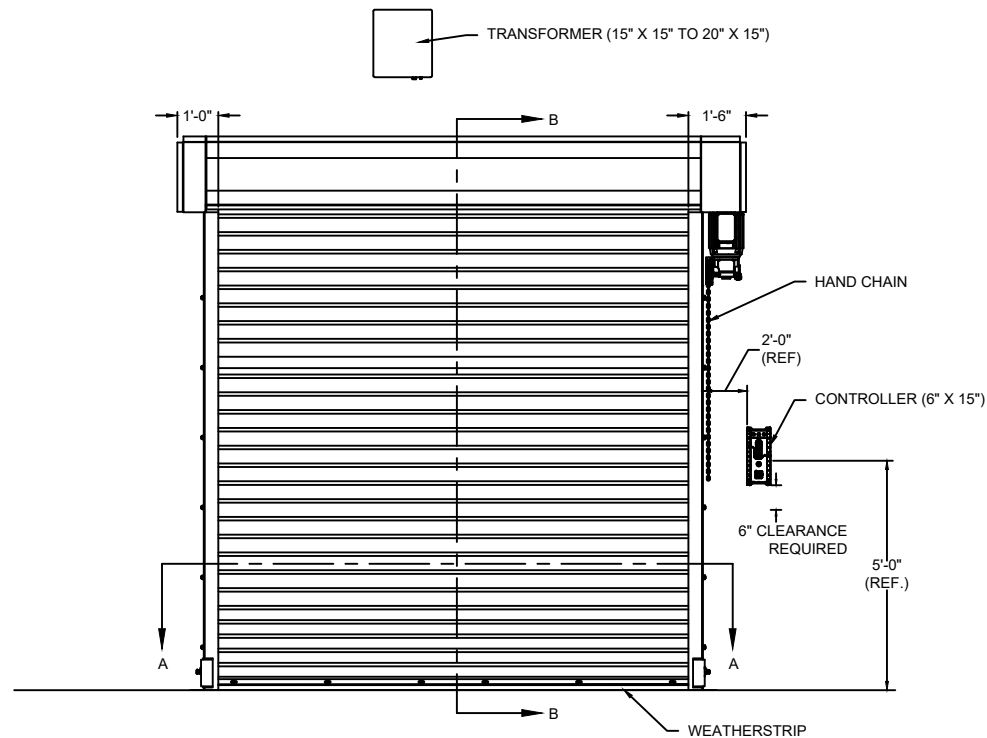

ELEVATION

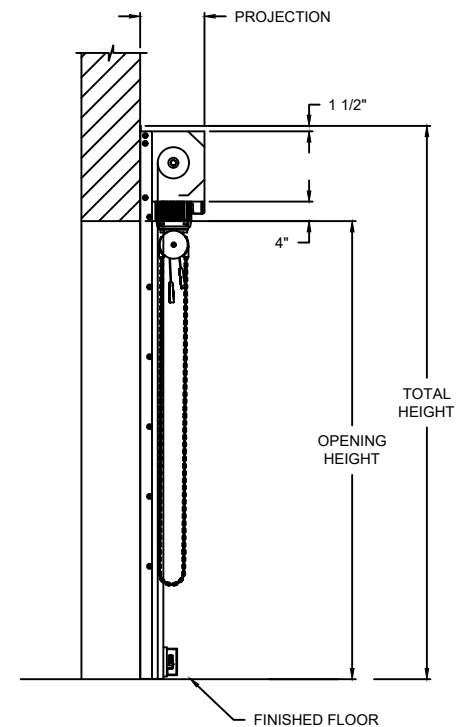

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"




SECTION A-A

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR RH 460V 3-PHASE 60HZ VIA TRANSFORMER (456-495V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERSERVE®

620S HEAVY DUTY STORMTITE™ SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original.
SHEET	BY:	




F-265 SLAT DETAIL

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620S	30'	20'

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTAGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

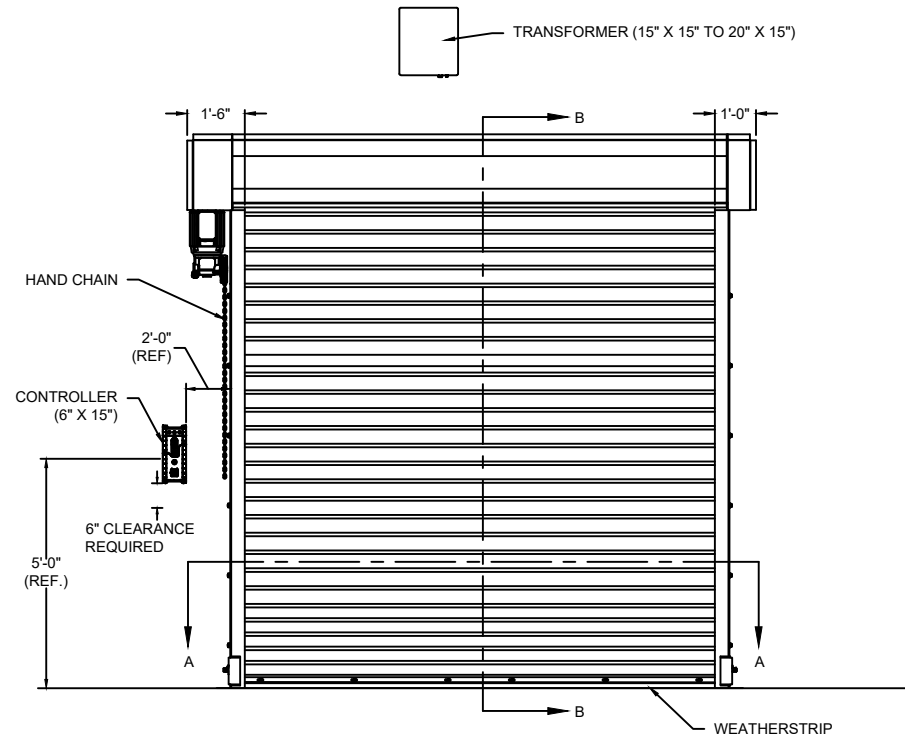

ELEVATION



SECTION A-A

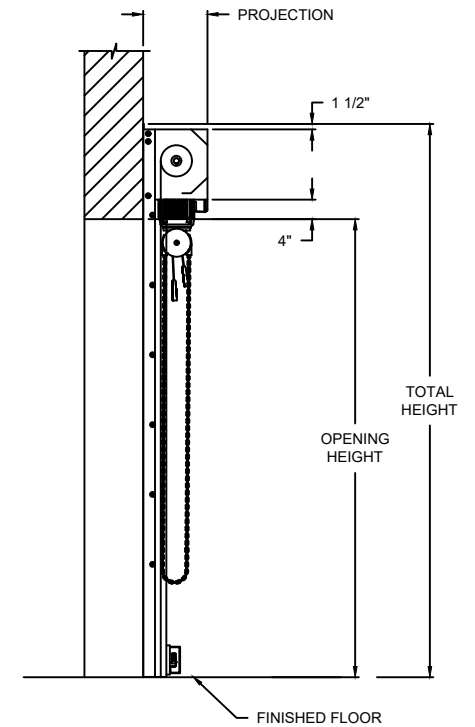

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR LH 460V 3-PHASE 60HZ VIA TRANSFORMER (456-495V RANGE)	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERSERVE®

620S HEAVY DUTY STORMTITE™ SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	




F-265 SLAT DETAIL

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620S	30'	20'

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTOGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

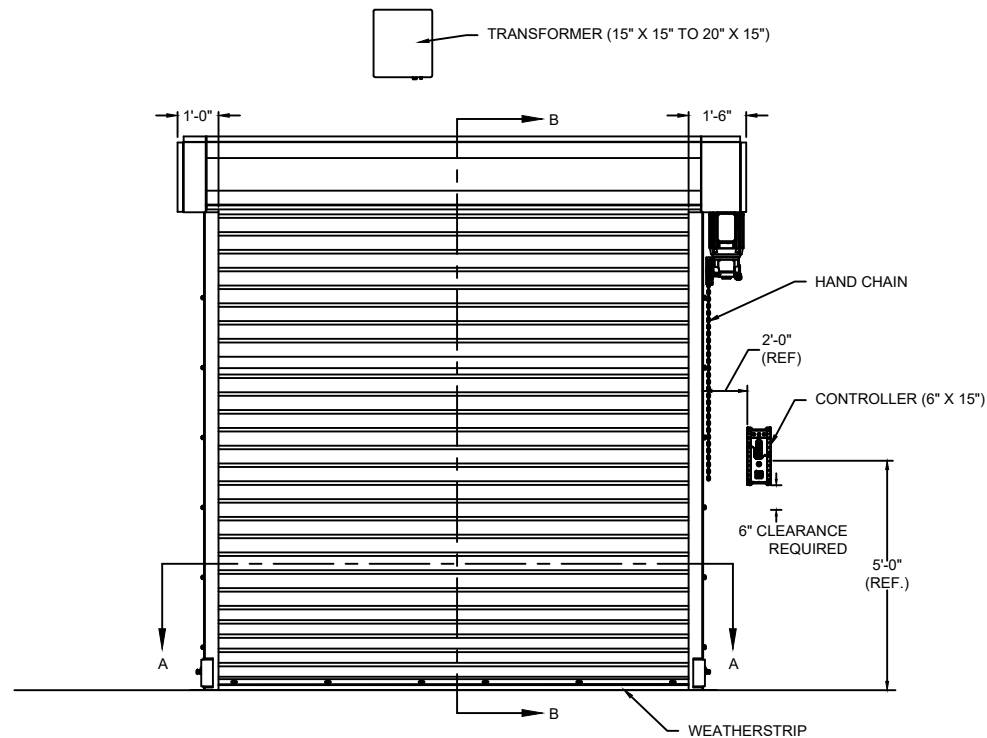

ELEVATION



SECTION A-A

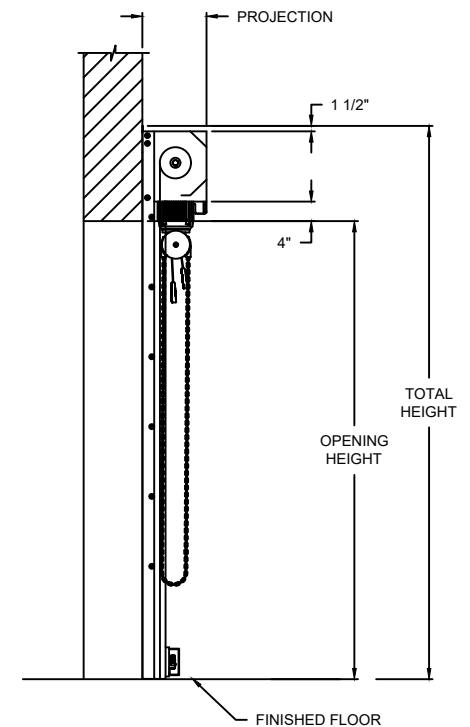

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR RH 575 V 3-PHASE 60HZ	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERSERVE®

620S HEAVY DUTY STORMTITE™ SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. EVERSERVE® OVERHEAD DOOR
SHEET	BY:	




F-265 SLAT DETAIL

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620S	30'	20'

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
GUIDE OPTIONS	☐ E GUIDE ☐ Z GUIDE
HOOD OPTIONS	☐ INTERIOR OCTOGON ☐ INTERIOR ROUND ☐ INTERIOR SQUARE ☐ EXTERIOR SLOPED

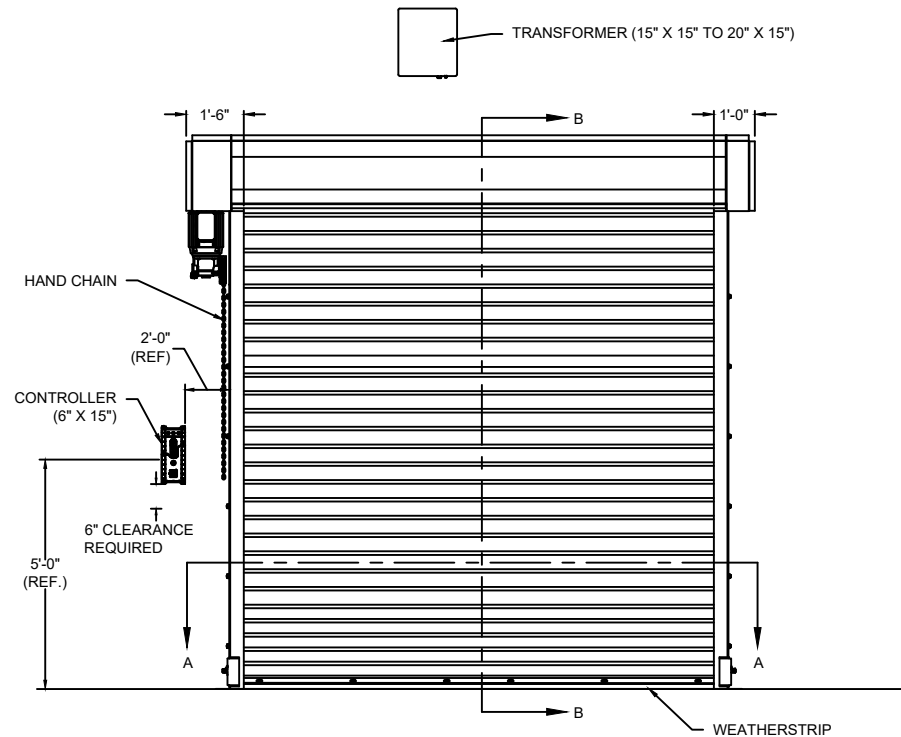

ELEVATION



SECTION A-A

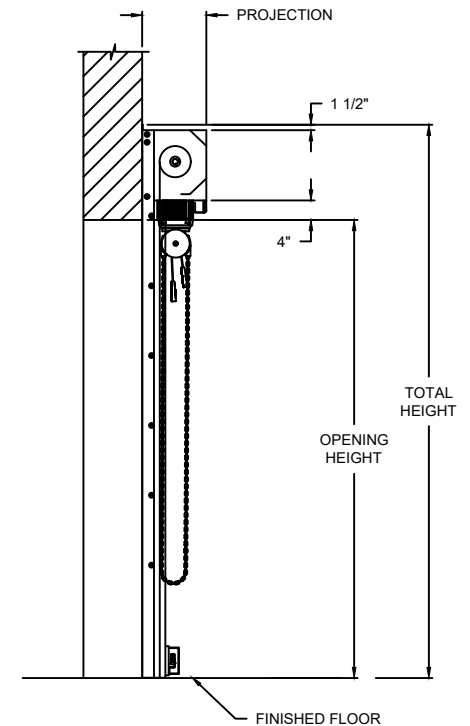

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	26" X 28"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MOTOR LH 575 V 3-PHASE 60HZ	1. WINDLOAD 20 P.S.F
CURTAIN	GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERSERVE®

620S HEAVY DUTY STORMTITE™ SPRINGLESS SERVICE DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	