
MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
780CD	16'	16'


UP TO 3" MAY BE CUT OFF OF ENDS WHICH
DO NOT HAVE CHAIN HOIST OR OPERATOR.

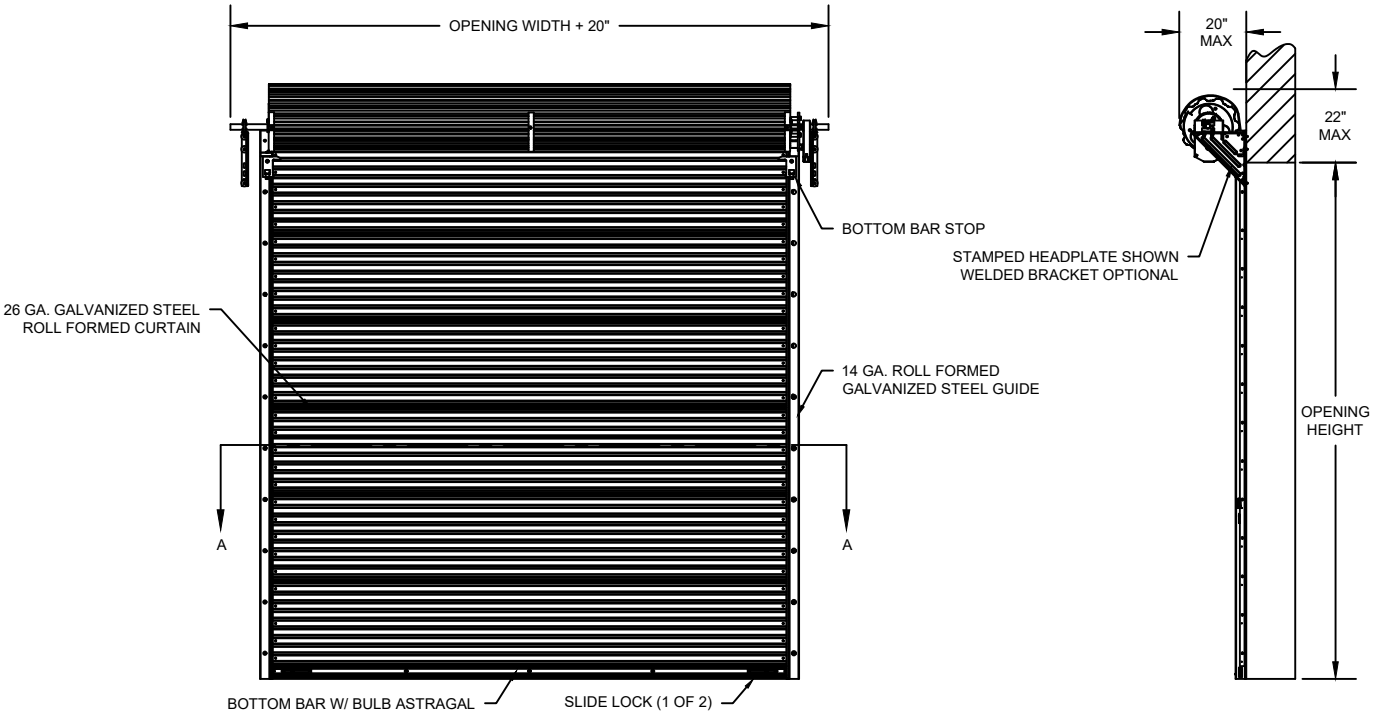

LOCKING SHALL BE BY:
A. TWO SLIDE LOCKS ATTACHED TO
BOTTOM BAR SUITABLE FOR PADLOCKS.
B. AN OPTIONAL CHAIN HOIST LOCK.
C. AN OPTIONAL CURTAIN LOCK SUITABLE
FOR DUAL PADLOCKS


ELEVATION

SIDE VIEW

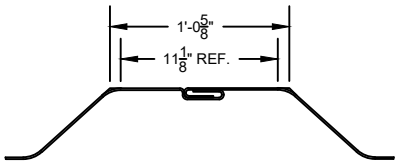

JOINT DETAIL

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
OPERATION OPTIONS	☐ MANUAL ☐ CHAIN HOIST ☐ ELECTRIC
LOCK OPTIONS	☐ SLIDE LOCKS ☐ CHAIN HOIST LOCKS ☐ CURTAIN LOCK

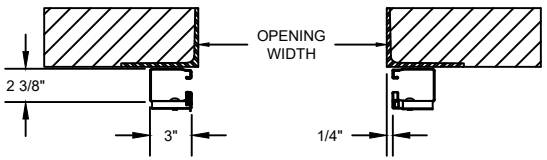

COMPONENT	MATERIAL	NOTES:
HEADPLATE	STEEL	1. CLEARANCES SHOWN ARE MAXIMUMS, LESSER CLEARANCES MAY BE POSSIBLE. 2. ALL OPENING PREPARATION, ELECTRICAL POWER, AND FIELD PAINTING SHALL BE PROVIDED BY OTHERS. 3. FERROUS SURFACES ARE GALVANIZED.
CURTAIN	GALVANIZED STEEL	
GUIDES	GALVANIZED STEEL	
BOTTOM BAR	ALUMINUM	

PROSTAR™

780CD ROLLING STEEL SHEET DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	