RESET FORM

SPECIFICATIONS	
DOOR MARK	
QUANTITY	
WIDTH	
HEIGHT	
OPERATION	RIGHT HAND, DIRECT DRIVE MOTOR
MOUNT	INTERIOR FACE OF WALL
ENDLOCKS	ALTERNATE MALLEABLE IRON
RATINGS	FEMA / ICC500 ULB 4HR FIRE RATING
WINDLOAD	
WINDLOCKS	CONTINUOUS

MATERIAL	
CURTAIN	GALVANIZED STEEL
HOOD	24 GA. GALVANIZED STEEL
GUIDES	STEEL ANGLES
BOTTOM BAR	STEEL ANGLES

FINISH	
OTHER FERROUS SURFACES	POWDER COATED BLACK
CURTAIN	
HOOD	
BOTTOM BAR	

ACTUATORS

- ☐ 3 BUTTON STATION O.C.S.
- ☐ MOTION DETECTOR
- ☐ SENSING EDGE
- ☐ RADIO CONTROL — REMOTE QUANTITY
- ☐ LOOP DETECTOR — LOOP LENGTH

MOTOR	
VOLTS	115V 1-PHASE (208-245V RANGE)
HERTZ	60HZ



FULL SLAT SECTION



HALF SLAT SECTION

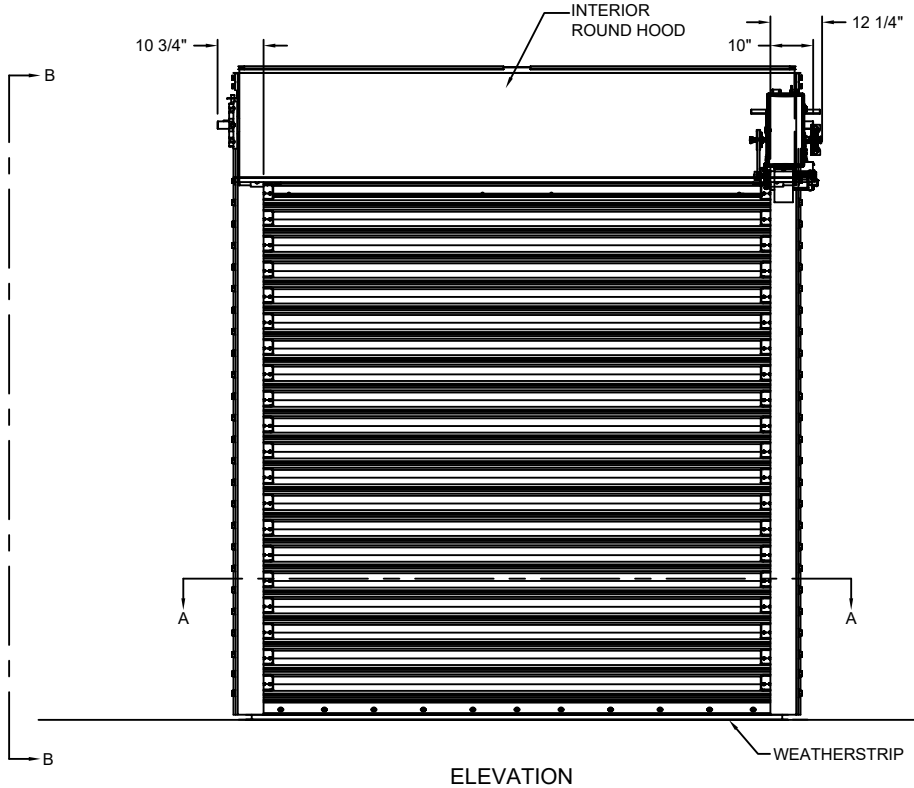

ELEVATION

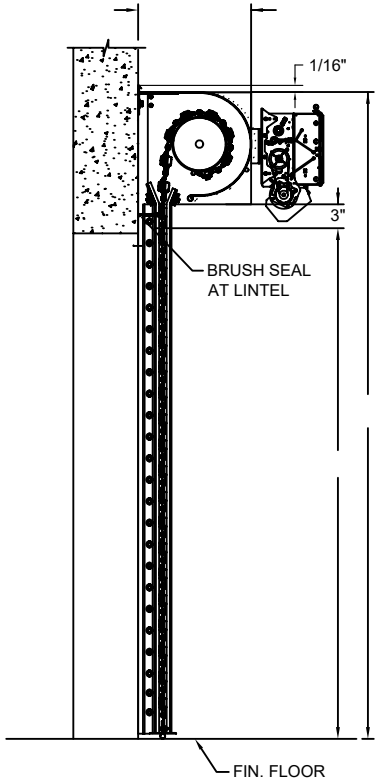

SECTION B-B

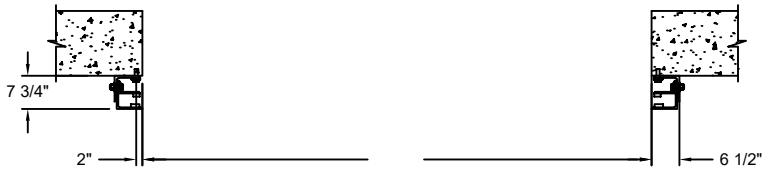

SECTION A-A

NOTES :

MODEL 610FR		
PROJECT		
ARCHITECT		
CONTRACTOR		
DISTRIBUTOR		
PLANT	PENNSYLVANIA	
DIST. DWG. NO.	DATE:	The Genuine. The Original.
SHEET	BY:	

PREPARED BY DISTRIBUTOR. NOT REVIEWED BY OVERHEAD DOOR CORPORATION. FORM REV -