



| MODEL | STANDARD MAX. VALUES |        |
|-------|----------------------|--------|
|       | WIDTH                | HEIGHT |
| 429   | 24' 2"               | 24' 1" |


NOTE: 5 SECTION, 3 PANEL DOOR SHOWN.  
SECTION AND PANEL QTY WILL VARY.

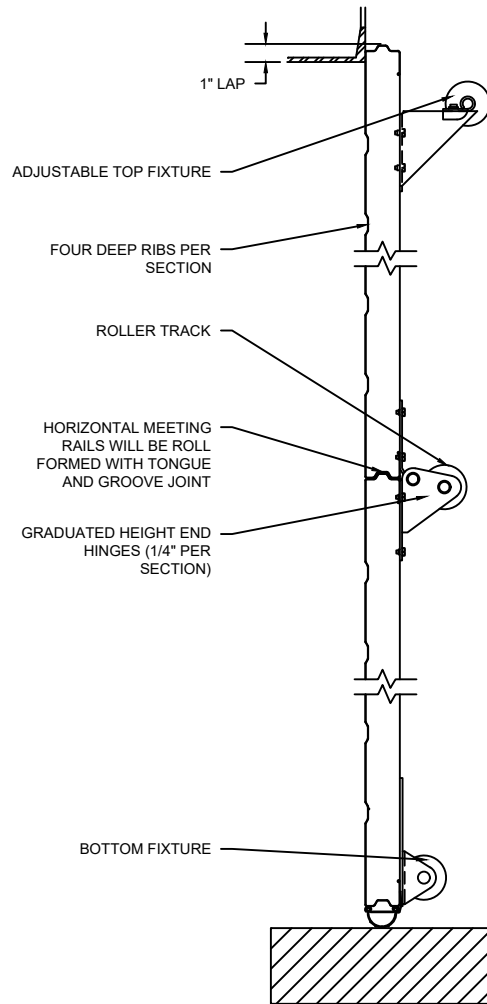

SECTION B-B

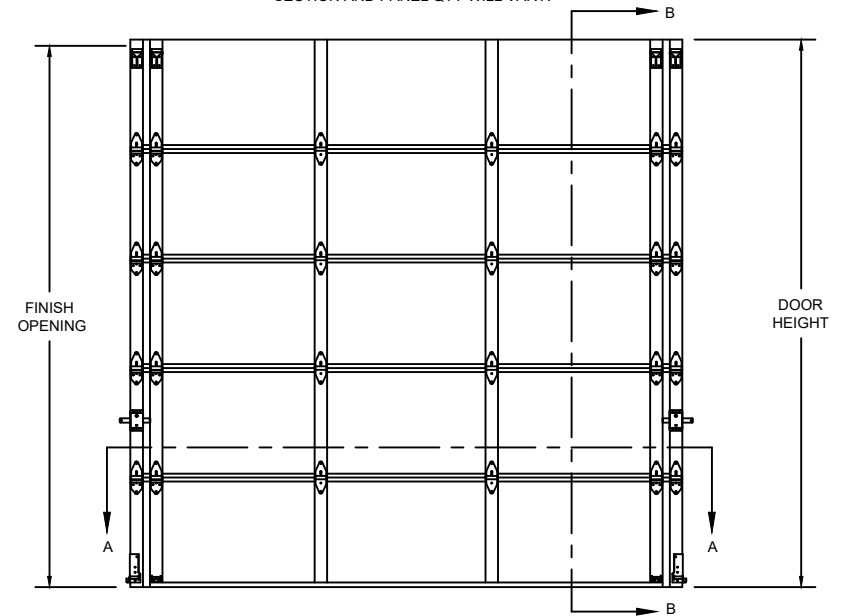

ELEVATION

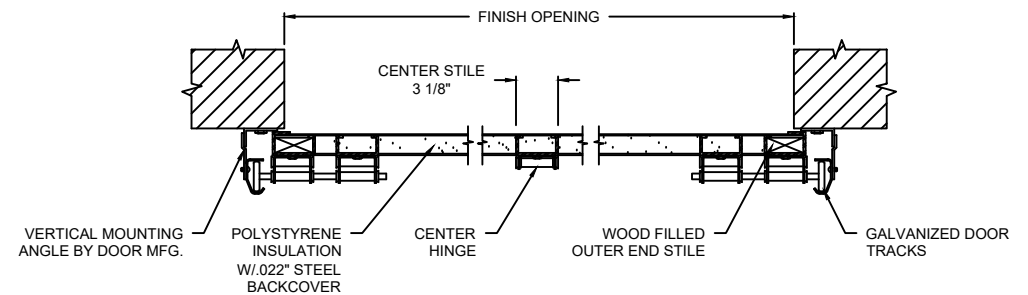

SECTION A-A

**OPTIONS**

|                   |   |
|-------------------|---|
| OPENING WIDTH     |   |
| OPENING HEIGHT    |   |
| ROLLER TRACK SIZE | <input type="checkbox"/> 2" <input type="checkbox"/> 3"   |
| END STILES        | <input type="checkbox"/> SINGLE<br><input type="checkbox"/> DOUBLE  |
| WINDOW OPTIONS    | <input type="checkbox"/> NO WINDOW<br><input type="checkbox"/> 12" X 8" IMPACT  |
| SEAL OPTIONS      | <input type="checkbox"/> JAMB SEAL<br><input type="checkbox"/> STANDARD BOTTOM SEAL<br><input type="checkbox"/> TOP SEAL<br><input type="checkbox"/> ELECTRIC SAFETY EDGE<br><input type="checkbox"/> PNEUMATIC SAFETY EDGE |
| LOCK OPTIONS      | <input type="checkbox"/> SLIDE LOCK<br><input type="checkbox"/> UNILOCK   |

| COMPONENT         | MATERIAL                      | OPERATION      | NOTES:  |
|-------------------|-------------------------------|----------------|---|
| SECTIONS          | 24 GA. ROLL-FORMED GALVANIZED | MANUAL PUSH UP | - WARRANTY: 1-YEAR LIMITED<br>- INSULATION WILL BE COMPOSED OF POLYSTYRENE PROVIDING INSULATION FACTORS OF 7.64 R-VALUE. OVERHEAD DOOR™ BRAND USES A CALCULATED DOOR SECTION R-VALUE FOR OUR INSULATED DOORS. |
| CENTER/END STILES | 20 GA. STEEL                  |                |   |
| HARDWARE          | GALVANIZED STEEL              |                |   |
| WEATHERSTRIP      | FLEXIBLE VINYL                |                |   |

# WINDSTORM™

429 SECTIONAL STEEL DOORS (INSULATED)

|          |       |                                       |
|----------|-------|---------------------------------------|
| DWG. NO. | DATE: | <b>The Genuine. The Original.</b><br> |
| SHEET    | BY:   |                                       |