

Y-CONNECT SIGNAL MERGING UNIT

PART NUMBER: OPAKYCONN.S



The Y-Connect is a UL325 recognized device that allows for the connection of two independent 2-wire FRABA OPTOEYES into the monitored input of a door operator board. If both connected photoeyes do not sense an obstruction, the operator receives a valid dynamic signal. If either of the photoeyes sense an obstruction, it will send an obstructed signal to the operator.


Specifications

- Compatible only with NEMA 4X Photoeyes
- Monitored safety sensors must be on the operator manufacturers UL 325 Listing
- When using two sets of monitored photocells, the minimum vertical separation is 45 inches.


Agency approvals

- UL 325 Recognized

Technical Drawings

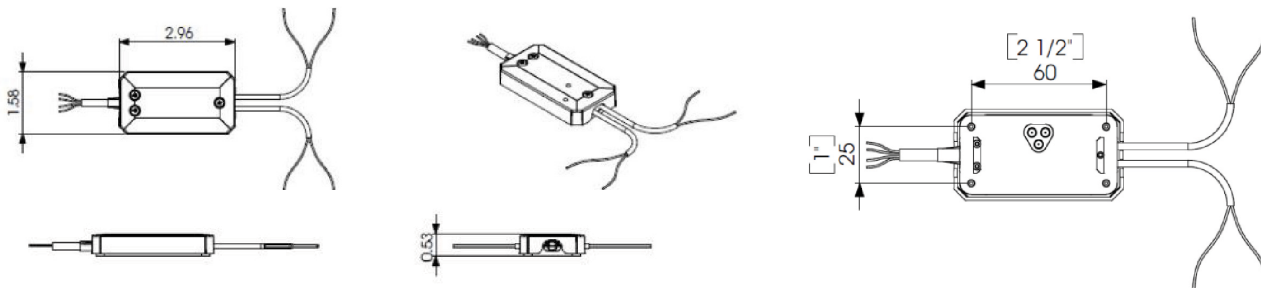

Wiring Information

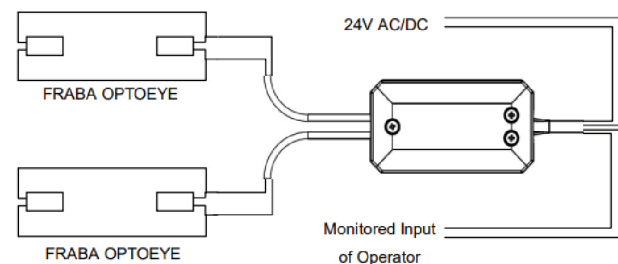

2501 S. State Hwy. 121 Bus., Suite 200, Lewisville, TX 75067
1-800-929-DOOR • sales@overheaddoor.com
overheaddoor.com

©2025 Overhead Door Corporation. Overhead Door is a trademark and the Red Ribbon logo and OHD Anywhere are registered trademarks of Overhead Door Corporation. All other trademarks are property of their rightful owners. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. C900-1541 11/25



**INDUSTRY EXPERTS,
DELIVERING TOTAL SOLUTIONS**